



Selection Guide


DC/DC

AC/DC

PMIC

Battery

Module

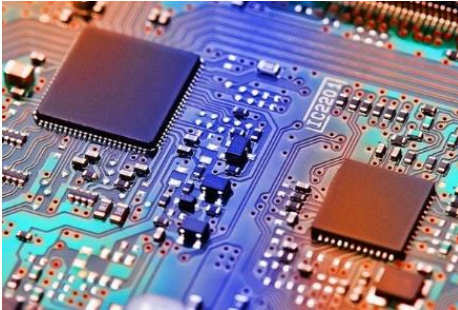

INDUSTRY 4.0



Lighting

Backlighting

MCU

ESD

Sensor

Motor

PLD

Audio

Gauge

SAR

Q1 2024



“

Silergy Corp was founded in 2008 and completed its IPO in 2013. By pursuing technology innovation and global expansion, Silergy has become the performance leader in the analog IC industry with annual growth rate of over 30% in the past 10 years.

The main products include: DC/DC, AC/DC, PMIC, LED lighting, BMS, light sensor, motor driver, audio power amplifier, power module, protection switch, Energy measurement, metering and signal chains solutions.

Silergy has the industry-leading process technology to design innovative mixed-signal and analog IC. Our products are widely used in automotive, industrial, consumer, computing and telecom equipment. We have always been committed to providing our customers with better performance and higher reliability analog IC.

”

IMPORTANT NOTICE

Right to make changes. Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

Applications. Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

Limited warranty and liability. Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

Suitability for use. Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Terms and conditions of commercial sale. Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

No offer to sell or license. Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

CONTENT

01

DC/DC

Single Output Step Down (Buck) Converter V_{IN} Max < 7V	7-10
Dual Output Step Down (Buck) Converter V_{IN} Max < 7V	10
Single Output Step Down (Buck) Converter V_{IN} Max > 7V	11-14
Single Output Step Up (Boost) Converter (Low Voltage)	15
Single Output Step Up (Boost) Converter (High Voltage)	16
DC/DC PWM Controller (External Switch)	16
Step Up/Down Regulator DC/DC (Power Switch Integrated)	17
LDO Regulator	17
Protection Switch	18-20
Supervisor& Reset IC	21

02

Battery

Switching Charger	22-25
Fast Charge	25
BMS	26
Wireless Charger	26
Gauge IC	26

03

PMIC

Low Voltage PMIC	28
------------------	----

CONTENT

04 AC/DC

Backlighting	30
LED Lighting (AC/DC)	31-34
LED Lighting (DC/DC)	35
LED Lighting (MR16)	36
AC/DC Charger and Adapter	37-40

05 Motor Driver

Motor Driver	42
--------------	----

06 Signal Chain

Class-D Amplifier	44
Headphone or Line Driver	45
Light Sensor	46
ESD Protection	47-50
Programmable Logic Device	51



DC/DC

Single Output Step Down (Buck) Converter V_{IN} Max < 7V

Part Number	V_{IN} Min (V) Max (V)		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (Ron H/L) (mΩ)	Quiescent Current (μA)	Package	Feature/ Special Function
SY20208ADFC	2.5	5.5	0.45	/	0.6	±2%	400/200	1.5	DFN2×2-8	Power Good Indicator, Ultra Low Quiescent Current
SY20011DFC	2.2	5.5	0.5	1	1.2	±1.5%	280/120	0.4	DFN2×2-8	Power Good Indicator, Output Auto Discharge
SY20213BDTC	1.85	5.5	0.6	3	0.4	±2%	350/250	40	DFN1.45×1-6	
SY20111DQC	2.5	5.5	1	2.5	0.6	±2%	230/150	40	DFN1.5×1.5-6	Output Auto Discharge
SY20018IAAC	2.5	5.5	1	1.5	0.6	±1.5%	260/170	50	SOT23-5	Output Auto Discharge
SY20018A1AAC	2.5	5.5	1	1.5	0.6	±1.5%	260/160	50	SOT23-5	
SY20061IDEC	2.5	5.5	1	1.5	0.6	±1.5%	220/130	50	DFN2×2-6	Auto Discharge
SY20095DEC	2.5	6.5	1	1.5	0.6	±2%	260/170	40	DFN2x2-6	
SY20097AAC	2.5	6.5	1	1.5	0.6	±2%	260/170	40	SOT23-5	
SY20108AAC	2.5	5.5	1	3	0.6	±2%	270/160	40	SOT23-5	
SY20109BDFC	2.4	6	1	1	1.2	±1.5%	300/130	400nA@STB=0 15μA @STB=1	DFN2×2-8	Power Good Indicator, ultra low I_Q , Hic-cup SCP, Auto Discharge
SY20019ARC	2.5	5.5	1	1.5	0.6	±1.5%	170/100	55	SOT563	Power Good Indicator, Hic-cup SCP, Auto Discharge
SY20019EARC	2.5	5.5	1	1.5	0.6	±1.5%	170/100	/	SOT563	Power Good Indicator, FCCM, Hic-cup SCP, Auto Discharge
SY20123QWC	2.6	5.5	1.5	2	0.6	±1%	180/100	55	QFN1.5×1.5-7	Power Good Indicator, Auto Discharge
SY20121ARC	2.6	5.5	1.5	2		±1%	180/100	55	SOT563	Output Auto Discharge
SY20122E1ABC	2.5	5.5	2	1.5	0.6	±1.5%	130/85	/	SOT23-6	Power Good Indicator, Hic-cup SCP, Output Auto Discharge
SY20122IABC	2.5	5.5	2	1.5	0.6	±1.5%	130/85	50	SOT23-6	Power Good Indicator, Latch-off Protection
SY20122A1ABC	2.5	5.5	2	1.5	0.6	±1.5%	130/85	50	SOT23-6	Power Good Indicator, Hic-cup Protection
SY20149A1AAC	2.7	5.5	2	1.5	0.6	±1.5%	130/85	50	SOT23-5	Output Auto Discharge
SY20149IAAC	2.5	5.5	2	1.5	0.6	±1.5%	130/85	50	SOT23-5	Latch-off Protection
SY20149E1AAC	2.5	5.5	2	1.5	0.6	±1.5%	130/85	/	SOT23-5	Hic-cup SCP, Auto Discharge
SY20162IABC	2.7	5.5	2	1.5	0.6	±1.5%	130/85	50	SOT23-6	Power Good Indicator
SY20114ARC	2.5	5.5	2	1.5	0.6	±1.5%	125/75	55	SOT563	Power Good Indicator, Hic-cup SCP, Auto-discharge
SY20114EARC	2.5	5.5	2	1.5	0.6	±1.5%	125 /75	/	SOT563	Power Good Indicator, Hic-cup SCP, Forced PWM, Auto Discharge
SY20012ART	2.5	5.5	2	1.5	0.6	±1.5% (-40~125°C)	45/35	21	SOT563	PFM Mode for Light Load Efficiency, Auto Discharge, ultra low I_Q
SY20013ART	2.5	5.5	3	1.5	0.6	±1.5% (-40~125°C)	45/35	21	SOT563	PFM Mode for Light Load Efficiency, Auto Discharge, ultra low I_Q
SY20113ADFC	2.7	5.5	3	1	0.6	±2%	110/80	55	DFN2×2-8	Power Good Indicator, Non-latch off protection
SY20113A1DFC	2.5	5.5	3	1.5	0.6	±1.5%	130/85	50	DFN2×2-8	Power Good Indicator, Hic-cup SCP, Auto Discharge
SY20113CDFC	2.7	5.5	3	3	0.6	±2%	100/80	55	DFN2×2-8	Power Good Indicator

Single Output Step Down (Buck) Converter V_{IN} Max < 7V

Part Number	V_{IN}		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
	Min (V)	Max (V)								
SY20115DBC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	55	DFN3 $\times$ 3-10	Power Good Indicator, Latch off Protection, Auto Discharge
SY20124QWC	2.7	5.5	3	1.5	0.6	$\pm 1\%$	85/50	65	QFN1.5 $\times$ 1.5-7	Power Good Indicator, Auto Discharge
SY20124LQWC	2.7	5.5	3	1.5	0.6	$\pm 1\%$	85/50	65	QFN1.5 $\times$ 1.5-7	Power Good Indicator, Auto Discharge
SY20193QWC	2.7	5.5	3	1	0.6	$\pm 1\%$	85/50	55	QFN1.5 $\times$ 1.5-7	Power Good Indicator, Light Load Mode Selection
SY20193LQWC	2.7	5.5	3	1	0.6	$\pm 1\%$	85/50	55	QFN1.5 $\times$ 1.5-7	Power Good Indicator, Light Load Mode Selection
SY20117DFC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	55	DFN2 $\times$ 2-8	Power Good Indicator, Latch off Protection, Auto Discharge
SY20117ADFC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	55	DFN2 $\times$ 2-8	Power Good Indicator, Hic-cup SCP, Auto Discharge
SY20117EDFC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	/	DFN2 $\times$ 2-8	Power Good Indicator, Hic-cup SCP, Forced PWM, Auto Discharge
SY20107ABC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	55	SOT23-6	Power Good Indicator, Latch off Protection, Auto Discharge
SY20107AABC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	55	SOT23-6	Power Good Indicator, Hic-cup SCP, Auto Discharge
SY20107EABC	2.5	5.5	3	1	0.6	$\pm 1.5\%$	85/60	/	SOT23-6	Power Good Indicator, Hic-cup SCP, Forced PWM, Auto Discharge
SY20112ARC	2.5	5.5	3	1.2	0.6	$\pm 1.5\%$	100/60	50	SOT563	Power Good Indicator, Output Auto Discharge
SY20112EARC	2.5	5.5	3	1.2	0.6	$\pm 1.5\%$	100/60	/	SOT563	Power Good Indicator, Hic-cup SCP, Forced PWM, Output Auto Discharge
SY20112LARC	2.5	5.5	3	1.2	0.6	$\pm 1.5\%$	100/60	50	SOT563	Power Good Indicator, Latch-off Protection, Output Auto Discharge
SY26023DQD	2.5	5.5	3	2.2	0.6	$\pm 1\%$	38/30	21	DFN1.5 $\times$ 1.5-6	Power Good Indicator, Hic-cup SCP/OVP/OTP, Auto Discharge
SY20053DQC	2.4	5.5	3	2.2	0.6	$\pm 1\%$	35/25	16	DFN1.5 $\times$ 1.5-6	Power Good Indicator, Hic-cup SCP/OVP/OTP, Auto Discharge, PFM Mode
SY26024DQD	2.5	5.5	4	2.2	0.6	$\pm 1\%$	38/30	21	DFN1.5 $\times$ 1.5-6	Power Good Indicator, Hic-cup SCP/OVP/OTP, Auto Discharge
SY20118ADFC	2.5	5.5	4	1	0.6	$\pm 1.5\%$	85/60	55	DFN2 $\times$ 2-8	Power Good Indicator, Hic-cup SCP, Auto Discharge
SY20212BAIC	2.6	5.5	4	1.8	/	$\pm 1\%$	70/40	80	TSOT23-8	Programmable Output Voltage: 0.7625V to 1.55V in 12.5mV/step; Default 1.15V output voltage
SY20212CAIC	2.6	5.5	4	1.8	/	$\pm 1\%$	70/40	80	TSOT23-8	Programmable Output Voltage: 0.7625V to 1.55V in 12.5mV steps; Default 1.05V output voltage
SY20214QDC	2.5	5.5	4	1.25	0.6	$\pm 1.5\%$	75/55	18	QFN3 $\times$ 3-16	Power Good Indicator
SY20217DQDC	2.5	5.5	4	1	/	$\pm 1\%$	70/40	30	QFN3 $\times$ 3-16	Power Good Indicator, VID control, Latch OVP/SCP/OTP, 4A Continuous, 7A Peak Load Current
SY20217FQDC	2.5	5.5	4	1	/	$\pm 1\%$	70/40	30	QFN3 $\times$ 3-16	Power Good Indicator, VID control, Latch-off OVP/SCP/OTP, 4A Continuous, 7A Peak Load Current
SY20216DFC	2.7	5.5	4	3	0.6	$\pm 1.5\%$	35/15	60	DFN2 $\times$ 2-8	Power Good Indicator
SY20904SYC	2.5	6	4	2.4	0.6	$\pm 1.5\%$ (-40~125°C)	25/17	23	DFN2 $\times$ 2-7	Auto Discharge, hic-cup SCP
SY20054DQC	2.4	5.5	4	2.2	0.6	$\pm 1\%$	35/25	16	DFN1.5 $\times$ 1.5-6	Power Good Indicator, Hic-cup SCP/OVP/OTP, Auto Discharge, PFM Mode

Single Output Step Down (Buck) Converter V_{IN} Max < 7V

Part Number	V_{IN} Min (V) Max (V)		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
SY20235QUC	2.5	5.5	5	2	0.6	$\pm 1.5\%$	55/35	18	QFN2 $\times$ 1.5-8	Power Good Indicator
SY20906SYC	2.5	6	6	1	0.6	$\pm 1.5\%$ (-40~125°C)	22/12	23	DFN2 $\times$ 2-7	Auto Discharge, hic-cup SCP
SY20218DBC	2.7	5.5	6	1	0.6	$\pm 1.5\%$	50/40	150	DFN3 $\times$ 3-10	Power Good Indicator, EXT SS
SY20246DFC	2.7	6.5	6	1.2	0.6	$\pm 1.5\%$	38/15	60	DFN2 $\times$ 2-8	Power Good Indicator, OCP/UVLO/OTP
SY20257KPKC	2.5	5.5	6	2.4		$\pm 1.5\%$	28/17	65	CSP1.56 $\times$ 1.96-20	Power Good Indicator, I ² C Programmable V_{OUT} : 0.7125V~1.5V in 12.5mV steps, ADDR: 1000001x
SY20228DFC	2.75	6	6	1.2	0.6	$\pm 1.5\%$	35/15	60	DFN2 $\times$ 2-8	Power Good Indicator, OCP/UVLO/OTP protections
SY20277QQC	2.7	5.5	12	1.5		$\pm 1\%$	12/6	95	QFN3 $\times$ 3-12	Programmable Output Voltage: 0.6V to 1.5V in 11mV steps
SY20183LDEC*	2.5	5.5	0.6	2.25	0.6	$\pm 1.5\%$	300/200	50	DFN2 $\times$ 2-6	
SY20018AAC*	2.5	5.5	1	1.5	0.6	$\pm 2\%$	260/170	40	SOT23-5	
SY20018LACC*	2.5	5.5	1	1.5	0.6	$\pm 2\%$	260/170	40	TSOT23-5	
SY20041DEC*	2.5	5.5	1	1.5	0.6	$\pm 1.5\%$	200/150	50	DFN2 $\times$ 2-6	
SY20051ADQC*	2.5	5.5	1	1.5	0.6	$\pm 2\%$	230/150	40	DFN1.5 $\times$ 1.5-6	
SY20061ADEC*	2.5	5.5	1	1.5	0.6	$\pm 2\%$	260/170	60	DFN2 $\times$ 2-6	Auto Discharge
SY20075LABC*	2.5	5.5	1	1.5	0.6	$\pm 2\%$	250/200	90	SOT23-6	Power Good Indicator
SY20081AAC*	2.5	5.5	1	2	0.6	$\pm 2\%$	260/170	40	SOT23-5	
SY20122BDQC*	2.5	5.5	1.5	1.5	0.6	$\pm 2\%$	210/130	60	DFN1.5 $\times$ 1.5-6	
SY20183DEC*	2.5	5.5	1.5	2.25	0.6	$\pm 1.5\%$	200/150	50	DFN2 $\times$ 2-6	Ext Mode
SY20122EABC*	2.7	5.5	2	1	0.6	$\pm 2\%$	110/80	/	SOT23-6	Power Good Indicator, Force PWM
SY20133LDLC*	2.7	5.5	2	1	0.6	$\pm 2\%$	120/90	55	DFN2 $\times$ 2-8	Power Good Indicator
SY20159PABC*	2.7	6.5	2	1	0.6	$\pm 2\%$	125/95	55	SOT23-6	Power Good Indicator, Non-latch off OVP
SY20159AAC*	2.7	6.5	2	1	0.6	$\pm 2\%$	125/95	55	SOT23-5	3A Peak Load Current
SY20149AAAC*	2.7	5.5	2	1	0.6	$\pm 2\%$	110/80	55	SOT23-5	Non latch off protection
SY20149AAC*	2.7	5.5	2	1	0.6	$\pm 2\%$	110/80	55	SOT23-5	Latch off protection
SY20162ABC*	2.7	5.5	2.5	1	0.6	$\pm 2\%$	100/80	80	SOT23-6	Power Good Indicator
SY20162EABC*	2.7	5.5	2.5	1	0.6	$\pm 2\%$	100/80	/	SOT23-6	Power Good Indicator, Force CCM

* Not recommended for new design

Single Output Step Down (Buck) Converter V_{IN} Max < 7V

Part Number	V_{IN} Min (V) Max (V)		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
SY20113DFC*	2.7	5.5	3	1	0.6	$\pm 2\%$	110/80	55	DFN2x2-8	Power Good Indicator, Latch SCP/OVP
SY20113EDFC*	2.7	5.5	3	1	0.6	$\pm 2\%$	110/80	-	DFN2x2-8	Power Good Indicator, Force CCM
SY20113FDFC*	2.7	5.5	3	1	0.6	$\pm 1.5\%$	110/80	/	DFN2x2-8	Power Good Indicator
SY20133GDFC*	2.7	5.5	3	1	0.6	$\pm 1.5\%$	110/80	55	DFN2x2-8	Power Good Indicator, Latch SCP/OVP
SY20194AQDC*	2.7	5.5	3	1.25	0.6	$\pm 2\%$	75/55	18	DFN3x3-16	Power Good Indicator
SY20207LQDC*	2.5	5.5	3	1.25	0.6	$\pm 2\%$	75/55	18	QFN3x3-16	Power Good Indicator
SY20153QUC*	2.5	5.5	3.5	2	0.6	$\pm 1.5\%$	55/35	18	QFN2x1.5-8	Power Good Indicator
SY20217QDC*	2.5	5.5	4	1	/	/	70/40	30	QFN3x3-16	Power Good Indicator, VID control, Latch OVP/SCP/OTP
SY20217BQDC*	2.5	5.5	4	1	/	$\pm 1\%$	70/40	30	QFN3x3-16	Power Good Indicator, VID control, Latch OVP/SCP/OTP, 4A Continuous, 7A Peak Load Current

* Not recommended for new design

Dual Output Step Down (Buck) Converter V_{IN} Max < 7V

Part Number	V_{IN} Min (V) Max (V)		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
SY20313ADBC	2.5	5.5	1A x2	2	0.6	$\pm 2\%$	220/180	35	DFN3x3-10	Individual EN
SY20311AIC	2.5	5.5	1A x2	1.5	0.6	$\pm 2\%$	260/180	45/55	TSOT23-8	Individual EN
SY20321AIC	2.5	5.5	2A x2	2	0.6	$\pm 2\%$	125/100	35/45	TSOT23-8	Individual EN
SY20334DCC	2.7	5.5	3A x2	1.5	0.6	$\pm 2\%$	105/85	80	DFN3x3-12	Individual EN
SY20341SAC	2.5	5.5	1A/1.5A	2	0.6	$\pm 2\%$	125/100	45	DFN2x1.5-8	Individual EN
SY20341BSAC	2.3	5.5	1Ax2	2	0.6	$\pm 2\%$	125/100	45	DFN2x1.5-8	Individual EN

Single Output Step down (Buck) Converter V_{IN} Max > 7V

Part Number	V_{IN} Min (V) Max (V)		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
SY21019ABC	5	40	0.3	2	0.6	$\pm 2.0\%$	2000/-	160	SOT23-6	
SY21034ADC	4.5	100	0.6	0.2	0.6	$\pm 1.0\%$	1000/-	100	TSOT23-6	Hic-cup SCP
SY21034BADC	4.5	100	1.2	0.2	0.6	$\pm 1.0\%$	1000/-	100	TSOT23-6	Hic-cup SCP
SY21035FCC	7	100	0.6	0.2~0.6	1.225	$\pm 2.0\%$	500/285	/	SO8E	Programmable Switching Frequency
SY21031ABC	4.5	50	0.8	1.2	0.6	$\pm 1.0\%$	700/-	150	SOT23-6	
SY21041ABC	4.5	27	1	0.5	0.6	$\pm 2.0\%$	350/150	400	SOT23-6	
SY21041CABC	4.5	27	1	1.15	0.6	$\pm 2.0\%$	350/150	400	SOT23-6	Force CCM
SY21036ABC	4.5	40	1	2	0.8	$\pm 1.0\%$	380/180	18	SOT23-6	Hic-cup SCP
SY21051FCC	7	100	1	0.2~1	1.2	$\pm 2.0\%$	500/240	400	SO8E	Programmable Switching Frequency
SY21053FCC	7	100	1	0.2~0.6	1.225	$\pm 2.0\%$	500/240	/	SO8E	Programmable Switching Frequency
SY21061ABC	5	40	1.2	0.8	0.6	$\pm 2.0\%$	180/-	160	SOT23-6	
SY21061FABC	9	36	1.2	0.3	0.81	$\pm 2.0\%$	180/-	160	SOT23-6	
SY21052AFCC	7	85	1.2	0.2~0.5	1.2	$\pm 2.0\%$	500/240	/	SO8E	Programmable Switching Frequency /FCCM, 1.2A Continuous/1.8A Peak Output Current Capability
SY21052FCC	7	85	1.2	0.2~0.5	1.2	$\pm 2.0\%$	500/240	400	SO8E	Programmable Switching Frequency, 1.2A Continuous/1.8A Peak Output Current Capability
SY21042ADC	4.5	28	1.7	0.5	0.6	$\pm 2.0\%$	350/150	400	TSOT23-6	Cycle-by-cycle Valley Current Limitation
SY21072IABC	4.2	18	2	0.5	0.6	$\pm 1.5\%$	130/105	200	SOT23-6	Hic-cup SCP
SY21072E1ABC	4.5	18	2	0.5	0.6	$\pm 1.5\%$	130/105	/	SOT23-6	FCCM, Hic-cup SCP
SY21081B1ABC	4.5	18	2	1.4	0.6	$\pm 1.5\%$	130/105	/	SOT23-6	Hic-cup SCP, FCCM
SY21081C1ABC	4.2	18	2	1.2	0.6	$\pm 1.5\%$	130/105	250	SOT23-6	Hic-cup SCP
SY21082ABC	4.2	18	2	0.5	0.6	$\pm 1.5\%$	130/105	200	SOT23-6	Hic-cup SCP
SY21087FAC	4.5	23	2	0.5	0.6	$\pm 1.5\%$	150/110	400	SO8	EXT SS, Hic-cup SCP
SY21102ABC	5	40	2	0.8	0.6	$\pm 2.0\%$	180/-	160	SOT23-6	
SY21142FCC	4.5	60	2	0.1~1	0.8	$\pm 1.0\%$	175/-	100	SO8E	Power Good Indicator, Hic-cup SCP, Adjustable Switching Frequency
SY21252FCC	4.5	100	2	0.1~1	0.8	$\pm 1.0\%$	175/-	100	SO8E	Power Good Indicator, Hic-cup SCP, Adjustable Switching Frequency
SY21253FCC	4.5	100	3	0.1~0.5	0.8	$\pm 1.0\%$	150/-	100	SO8E	Power Good Indicator, Hic-cup SCP, Adjustable Switching Frequency
SY21113C1ADC	4.2	18	3	1.2	0.6	$\pm 1.5\%$	80/40	270	TSOT23-6	Hic-cup SCP, Output Auto Discharge

Single Output Step Down (Buck) Converter, V_{IN} Max > 7V

Part Number	V _{IN}		I _{OUT} (Max) (A)	F _{SW} (MHz)	V _{OUT} (Min) (V)	Voltage Accuracy	MOSFET (Ron H/L) (mΩ)	Quiescent Current (μA)	Package	Feature/ Special Function
	Min (V)	Max (V)								
SY21113DAIC	4.5	18	3	0.5	0.6	±1.5%	80/40	100	TSOT23-8	Power Good Indicator, Hic-cup SCP, EXT SS
SY21113IADC	4.2	18	3	0.5	0.6	±1.5%	80/40	200	TSOT23-6	Hic-cup SCP
SY21113B1ADC	4.5	18	3	1.4	0.6	±1.5%	80/40	/	TSOT23-6	Hic-cup SCP
SY21113E1ADC	4.5	18	3	0.5	0.6	±1.5%	80/40	/	TSOT23-6	FCCM, Hic-cup SCP
SY21114ADC	4.2	18	3	0.5	0.6	±1.0%	80/40	250	TSOT23-6	Hic-cup SCP, Output auto discharge
SY21114EADC	4.2	18	3	0.6	0.6	±1.0%	80/40	/	TSOT23-6	Hic-cup SCP, Output auto discharge
SY21147FCC	4.5	23	3	0.5	0.6	±1.5%	130/90	400	SO8E	EXT SS
SY21143ADC	4.5	23	3	0.5	0.6	±1.5%	105/50	100	TSOT23-6	Hic-cup SCP
SY21143AIC	4.5	23	3	0.5	0.6	±1.5%	105/50	100	TSOT23-8	Power Good Indicator, EXT SS, Hic-cup SCP
SY21154AIC	4.5	30	3	0.5~2.5	0.6	±1.5%	110/70	19	TSOT23-8	Hic-cup SCP
SY21163FCC	5	40	3	0.8	0.6	±2.0%	180/-	160	SO8E	
SY21153AAIC	4.5	40	3	0.5~2.5	0.6	±1.5%	110/70	18	TSOT23-8	
SY21173FCC	4.5	60	3	0.1~0.5	0.8	±1.0%	150/-	100	SO8E	Adjustable switching frequency range: 100kHz ~500kHz, hic-cup SCP
SY21174IADC	4.2	18	4	0.5	0.6	±1.5%	55/36	200	TSOT23-6	Hic-cup SCP
SY21144RAC	4	23	4	0.6	0.6	±1.0%	85/35	130	QFN3×3-20	Power Good Indicator, Output Discharge, SCP/OVP,UVLO
SY21145RAC	4	23	4	0.5	0.6	±1.0%	85/35	121	QFN3×3-20	Power Good Indicator, Output Discharge, SCP/OVP,UVLO
SY21145BRAC	4	23	4	0.6	Fixed 3.338	±1.0%	85/35	80	QFN3×3-20	Power Good Indicator, Output Discharge,SCP/OVP,UVLO
SY21145CRAC	5.5	23	4	0.6	Fixed 5.1	±1.0%	85/35	115	QFN3×3-20	Power Good Indicator, Output Discharge, SCP/OVP,UVLO
SY21195IADC	4.5	18	5	0.5	0.6	±1.5%	41/27	250	TSOT23-6	
SY21211DNC	4.5	30	5	0.5	0.6	±1.5%	70/40	200	DFN3×4-12	Power Good Indicator, EXT SS
SY21211FCC	4.5	30	5	0.5	0.6	±1.5%	70/40	200	SO8E	EXT SS
SY21197ADC	4.5	18	6	0.4	0.6	±1.0%	29/19	200	TSOT23-6	Output Auto Discharge, SCP
SY21138RHC	4.5	24	6	0.5	0.6	±1.0%	38/19	100	QFN2.5×2.5-16	Power Good Indicator, Output Discharge, Latch-off UVP/OVP/OTP
SY21138ARHC	4.5	24	6	0.6	0.6	±1.0%	38/19	100	QFN2.5×2.5-16	Power Good Indicator, Output Discharge, Hic-cup UVP
SY21138BRHC	4.5	24	6	0.6	Fixed 3.338	±1.0%	36/18	75	QFN2.5×2.5-16	Power Good Indicator, Latch-off Protection, Output Discharge
SY21138CRHC	5.5	24	6	0.6	Fixed 5.1	±1.0%	36/18	130	QFN2.5×2.5-16	Power Good Indicator, Latch-off Protection, Output Discharge
SY21215QNC	4	28	6	0.8	0.6	±1.5%	40/20	100	QFN3×3-10	Power Good Indicator, Latch-off SCP/OVP, 12A Peak Current Capability, Programmable peak current limit

Single Output Step Down (Buck) Converter, V_{IN} Max > 7V

Part Number	V_{IN}		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (Ron H/L) (mΩ)	Quiescent Current (μA)	Package	Feature/ Special Function
Min (V)	Max (V)									
SY21215AQQC	4	28	6	0.8	0.6	±1.5%	40/20	100	QFN3x3-12	Power Good Indicator, Hic-cup SCP/OVP, 12A Peak current capability, programmable peak current limit
SY21215HQQC	4	28	6	0.8	0.6	±1.5%	40/20	100	QFN3x3-12	Power Good Indicator, Hic-cup SCP, 12A Peak current capability, programmable peak current limit
SY21215KQQC	4	28	6	0.5	0.6	±1.5%	40/20	100	QFN3x3-12	Power Good Indicator, Hic-cup SCP, 12A peak current capability, programmable peak current limit
SY21243RHC	4.5	24	8	0.5	0.6	±1.0%	30/15	100	QFN2.5x2.5-16	Power Good Indicator, Output Discharge, Latch-off UVP/OVP
SY21243ARHC	4	24	8	0.6	0.6	±1.0%	20/10	140	QFN2.5x2.5-16	Power Good Indicator, Hic-cup UVP, Output discharge
SY21243BRHC	4.5	24	8	0.6	Fixed 3.338	±1.0%	30/15	75	QFN2.5x2.5-16	Power Good Indicator, Latch-off Protection, Auto-discharge
SY21243B3RHC	4	24	8	0.6	Fixed 3.338	±1.0%	20/10	85	QFN2.5x2.5-16	Power Good Indicator, Latch-off Protection, Auto-discharge
SY21243C3RHC	5.5	24	8	0.6	Fixed 5.1	±1.5%	20/10	85	QFN2.5x2.5-16	Power Good Indicator, Latch-off Protection, Auto-discharge
SY21243D3RHC	4	24	8	0.5	0.6	±1%	20/10	140	QFN2.5x2.5-16	Power Good Indicator, Latch-off Protection, Auto-discharge
SY21228AQQC	4	28	8	0.8	0.6	±1.0%	20/10	100	QFN3x3-12	Power Good Indicator, Hic-cup SCP, 16A Peak current capability, programmable output current limit
SY21228LQQC	4.5	28	8	0.5	0.6	±1.0%	20/10	100	QFN3x3-12	Power Good Indicator, OVP
SY21245RBC	4	40	8	0.35/ 0.5	0.6	±1.0%	25/12	60	QFN3.5x3.5-20	Power Good Indicator, programmable soft-start & valley current limit, hic-cup SCP, selectable switching frequency
SY21240RAC	4	24	9	0.6	0.6	±1.0%	27/9	85 in S3 125 in S0	QFN3x3-20	Power Good Indicator, 9A continuous/14A peak current capability, Latch-off UVP/OVP, ±1A Source/Sink Current Capability of the VTT LDO
SY21240DRAC	4	24	9	0.6	0.6	±1.0%	27/9	65 in S3 110 in S0	QFN3x3-20	Power Good Indicator, 9A Continuous/12A Peak Current Capability, Latch-off UVP/OVP, ±1A Source/Sink Current Capability of the VDDQ LDO
SY21247CTMC	5.5	23	10	0.6	Fixed 5.15	±1.5%	18/8	110	QFN3x4-13	Power Good Indicator, OVP/SCP
SY21246BTMC	4	24	10	0.6	Fixed 3.36	±1.0%	18/8	85	QFN3x4-13	Power Good Indicator, Latch-off Protection, Auto-discharge
SY21249TMC	4	24	11	0.5	0.6	±1.0%	17/7.5	140	QFN3x4-13	Power Good Indicator, Latch-off UVP/OVP, Output discharge
SY21249C1TMC	5.5	24	11	0.6	Fixed 5.15	±1.5%	17/7.5	110	QFN3x4-13	Power Good Indicator, Latch-off UVP/OVP, Output Discharge
SY21712VDC	2.7	16	12	0.6/ 0.8/1	0.6	±1.0% (-40~125°C)	12.6/4.3	650	QFN3x4-19	Power Good Indicator; Remote sense, Seamless ILMT, Pre-bias startup, FCCM/PFM, Hic-cup SCP, Programmable Soft-start Time
NEW										
SY21164RRC	2.85	18	12	0.5/ 0.75/1/ 1.25	0.6	±1.0%	15/4.5	540	QFN3x4-14	Power Good Indicator, selectable Hic-cup/Latch-off SCP, 12A Continuous/15A Peak Current Capability, Programmable Soft-start Time
SY21720VDC	2.9	16	20	0.6/ 0.8/1	0.6	±1.0% (-40~125°C)	7.5/2.4	550	QFN3x4-19	Power good Indicator; Remote sense, Seamless ILMT, Pre-bias startup, FCCM/PFM, Hic-cup SCP, Programmable Soft-start Time
SY21072B1ABC*	4.5	18	2	0.5	0.6	±2.0%	130/120	400	SOT23-6	
SY21081ABC*	4.5	18	2	1	0.6	±2.0%	170/160	400	SOT23-6	
SY21081BABC*	4.35	18	2	1.2	0.6	±2.0%	170/160		SOT23-6	1.2MHz, FCCM

* Not recommended for new design

Single Output Step Down (Buck) Converter, V_{IN} Max > 7V

Part Number	V_{IN}		I_{OUT} (Max) (A)	F_{SW} (MHz)	V_{OUT} (Min) (V)	Voltage Accuracy	MOSFET (R_{on} H/L) (m Ω)	Quiescent Current (μ A)	Package	Feature/ Special Function
SY21081CABC*	4.5	18	2	1.2	0.6	$\pm 2.0\%$	130/120	400	SOT23-6	
SY21081DEC*	4.5	18	2	1	0.6	$\pm 2.0\%$	170/160	400	DFN2×2-6	
SY21092DBC*	4.5	23	2	0.5	0.6	$\pm 1.5\%$	150/110	400	DFN3×3-10	Power Good Indicator, EXT SS, Hic-cup SCP
SY21113BADC*	4.5	18	3	0.5	0.6	$\pm 1.5\%$	80/40	100	TSOT23-6	Hic-cup SCP
SY21113CADC*	4.5	18	3	1	0.6	$\pm 1.5\%$	80/40	100	TSOT23-6	Hic-cup SCP
SY21113GADC*	4.5	18	3	0.5	0.6	$\pm 1.5\%$	80/40	100	TSOT23-6	Hic-cup SCP, FCCM
SY21123ADBC*	4.5	23	3	1	0.6	$\pm 1.5\%$	120/85	400	DFN3×3-10	Power Good Indicator, EXT SS
SY21152FCC*	4.5	30	3	0.5	0.6	$\pm 1.5\%$	80/50	200	SO8E	Power Good Indicator, EXT SS
SY21133DBC*	4.5	23	3	0.5	0.6	$\pm 1.5\%$	120/85	400	DFN3×3-10	Power Good Indicator, EXT SS, Hic-cup SCP
SY21174AADC*	4.5	18	4	0.5	0.6	$\pm 1.5\%$	50/30	100	TSOT23-6	Instant PWM architecture
SY21174ADC*	4.5	18	4	0.5	0.6	$\pm 1.5\%$	50/30	100	TSOT23-6	
SY21195AADC*	4.5	18	5	0.5	0.6	$\pm 1.5\%$	40/20	100	TSOT23-6	Instant PWM architecture
SY21195ADC*	4.5	18	5	0.5	0.6	$\pm 1.5\%$	50/30	100	TSOT23-6	
SY21236RAC*	4	23	6	0.5	0.6	$\pm 1.0\%$	38/19	120	QFN3×3-20	Power Good Indicator, Output Auto Discharge, Latch-off Protection
SY21236ARAC*	4	23	6	0.6	0.6	$\pm 1.0\%$	38/19	120	QFN3×3-20	Power Good Indicator, Output Auto Discharge, Hic-cup SCP
SY21236BRAC*	4	23	6	0.6	Fixed 3.37	$\pm 1.5\%$	38/19	75	QFN3×3-20	Power Good Indicator, Output Auto Discharge, Latch-off Protection
SY21236CRAC*	5.5	23	6	0.6	Fixed 5.1	$\pm 1.5\%$	38/19	108	QFN3×3-20	Power Good Indicator, Output Auto Discharge, Latch-off Protection
SY21248ARAC*	4	23	8	0.6	0.6	$\pm 1.0\%$	22/11	120	QFN3×3-20	Power Good Indicator, Output Discharge, Hic-cup SCP
SY21248BRAC*	4	23	8	0.6	Fixed 3.37	$\pm 1.5\%$	22/11	75	QFN3×3-20	Power Good Indicator, Output Discharge, Latch-off UVP/OVP
SY21248CRAC*	5.5	23	8	0.6	Fixed 5.1	$\pm 1.5\%$	22/11	108	QFN3×3-20	Power Good Indicator, Output Discharge, Latch-off UVP/OVP
SY21248RAC*	4	23	8	0.5	0.6	$\pm 1.0\%$	30/10	105	QFN3×3-20	Power Good Indicator, Output Discharge, Latch-off UVP/OVP
SY21241AQVC*	4	28	10	0.6	0.6	$\pm 1.5\%$	25/8	300	QFN4×3-19	Power Good Indicator, Memory power, 10A VDDQ/2A VTT LDO, 16A Peak Current capability, Latch off UVP/OVP, Over temperature alert
SY21241DQVC*	4	28	10	0.6	0.6	$\pm 1.5\%$	25/8	300	QFN4×3-19	Power Good Indicator, Memory Power, 10A VDDQ/1A VTT LDO, 16A Peak Current Capability, Latch-off UVP/OVP, Over temperature alert
SY21247TMC*	4	23	10	0.5	0.6	$\pm 1.0\%$	28/8	100	QFN3×4-13	Power Good Indicator, Latch-off OVP/SCP
SY21262QCC*	4	18	12	0.2~1	0.6	$\pm 1.0\%$	18/6	/	QFN4×4-20	Power Good Indicator

* Not recommended for new design

Single Output Step Up (Boost) Converter (Low Voltage)

Part Number	V _{IN}		I _{LIM} (A)	F _{SW} (MHz)	V _{OUT} (Max) (V)	Sync Boost	Fixed Output Voltage (V)	V _{FB} / Accuracy	Quiescent Current Input (μA)	Quiescent Current output (μA)	MOSFET R _{on} (H/L)(mΩ)	Feature/ Special Function	Package
SY20417AAC	0.7	5	0.35	/	/	✓	3.3	/	0.5	5.5	700/500	Pass-through Function@ Shutdown	SOT23-5
SY20417AAAC	0.7	5	0.35	/	/	✓	3	/	0.5	5.5	700/500		SOT23-5
SY20418AHC	0.7	5	0.35	/	5.25	✓	/	1.0V±3%	0.5	5	700/500	Pass-through Function@ Shutdown	SOT-363
SY20418AAHC	0.7	5	0.35	/	/	✓	5	/	0.5	7	500/400	Pass-through Function@ Shutdown; OVP	SOT-363
SY20492DABC	0.85	5.5	0.6	1	5.5	✓	/	0.5V±1.5%	0.7	5	170/100	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	SOT23-6
SY20419SUD	1.8	5.5	1	1	5.5	✓	/	1.2V±1.5%	/	/	125/70	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP, CCM Only	DFN2×1.5-6
SY20492AABC	0.85	5.5	2	1	5.5	✓	/	1.2V±1.5%	0.7	5	170/100	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	SOT23-6
SY20492ABC	1.8	5.5	2	1	5.5	✓	/	1.2V±1.5%	0.7	5	170/100	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	SOT23-6
SY20493SUC	0.85	5.5	2	1	5.5	✓	/	1.2V±1.5%	0.7	5	125/70	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	DFN2×1.5-6
SY20433QMC	1.8	5.25	3	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/36	Output Disconnect @Shutdown	QFN2×2-10
SY20489ADC	2.5	5.5	3	1	5.5	✓	/	1.2V±1.5%	8	32	90/50	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	TSOT23-6
SY20489BADC	2.5	5.5	3	1	5.5	✓	/	1.2V±1.5%	8	32	90/50	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	TSOT23-6
SY20489CUMC	2.5	5.5	3	1	5.6	✓	/	1.2V±1.5%	8	32	100/70	Auto Bypass Mode When V _{IN} ≥ V _{OUT} ; OVP	CSP1.54×0.9-6
SY20445QMC	1.8	5.25	5	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	Auto Output Discharge Function, Input Battery Voltage Monitor, OVP	QFN2×2-10
SY20445AQMC	1.8	5.25	5	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	No Output Discharge Function, Input Battery Voltage Monitor, OVP	QFN2×2-10
SY20496QMC	2	5.5	6	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	Selectable Forced PWM Mode, Programmable Output Current Limit, OVP	QFN2×2-10
SY20466QMC	1.8	5.25	6	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	Auto Output Discharge Function, Input Battery Voltage Monitor, OVP	QFN2×2-10
SY20466AQMC	1.8	5.25	6	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	No Output Discharge Function, Input Battery Voltage Monitor, OVP	QFN2×2-10
SY20466BQMC	1.8	5.25	6	0.5	5.5	✓	/	1.2V±1.5%	10	27	40/20	Selectable Forced PWM Mode, OVP	QFN2×2-10
SY20411LAHC*	0.7	5	0.2	/	5.25	✓	/	0.5V±3%	0.5	18	800/450	Pass-through Function@ Shutdown; OVP	SOT-363
SY20411AHC*	0.7	5	0.4	/	5.25	✓	/	0.5V±3%	0.5	18	800/450	Pass-through Function@ Shutdown; OVP	SOT-363
SY20428ABC*	0.9	4	1.8	1.2	4	✓	/	1.2V±3%	65	/	200/90	Output Disconnect @Shutdown	SOT23-6
SY20508DGC*	2.3	5.25	3	1	5.5	✓	/	1.2V±1.5%	2	30	85/70	OVP	DFN2×3-8
SY20508EDGC*	2.3	5.25	3	1	5.5	✓	/	1.2V±1.5%	/	/	85/70	FCCM, OVP	DFN2×3-8

* Not recommended for new design

Single Output Step Up (Boost) Converter (High Voltage)

Part Number	V _{IN}		I _{LIM} (A)	F _{SW} (MHz)	V _{OUT} (Max) (V)	Sync Boost	V _{FB} / Accuracy	Input Quiescent Current (μA)	MOSFET (Ron H/L) (mΩ)	Feature/ Special Function	Package
SY21199CABC	3	25	0.6	1	25		0.6V±2%	100	-/150	Internal SS/Comp	SOT23-6
SY21212AABC	3	8	2	1	16		0.6V±2%	100	-/130	Internal SS/Comp	SOT23-6
SY21218LABC	3	25	2	1	25		0.6V±2%	100	-/150	Internal SS/Comp	SOT23-6
SY21222ABC	3	33	2	1	33		0.6V±2%	100	-/200	Internal SS/Comp	SOT23-6
SY21238ABC	3.5	30	2	0.85	30		1V±2%	150	-/200	Accurate input current limit	SOT23-6
SY21242ABC	2	6	2.5	1	6		0.6V±2%	200	-/120	Internal SS/Comp	SOT23-6
SY21264ADBC	2	6	4	1	6		0.6V±2%	100	-/90	Internal SS/Comp	DFN3×3-10
SY21275DBC	8.6	15.9	4.5	0.5	16		1.25V±1.5%	120	-/75	Adjustable soft-start time, OVP	DFN3×3-10
SY21282QDC	3	9	6	1	13	✓	1V±2%	600	40/80	Power Good Indicator, Integrated 40mΩ Disconnection FET, True Shutdown	QFN3×3-16
SY21299DBC	3	5.5	9	/	36		1.25V±2%	380	-/65	EXT Comp	DFN3×3-10
SY21305ARDC	3	16	15	0.25~1	16	✓	1V±1.5%	230	12/9	Power Good Indicator, Integrated 12mΩ Disconnection FET, Internal SS, OVP/SCP/ True shutdown Programmable Switching Frequency: 0.25~1MHz	QFN4×4-18
SY21314DBC	3	33	4	1	33		0.6V±2%	100	-/120		QFN3×3-10
SY21225RDC	4.5	30	15	0.2~1	30	✓	1V±1.5%	230	18/16	Integrated 18mΩ Disconnect ion FET, OVP/OTP/SCP, True Shutdown, Programmable Switching Frequency: 0.2~1MHz, Power Good Indicator	QFN4×4-18
SY21306RAC	2.8	16	2~10	0.3~2	16	✓	1V±1%	200	20/10	PFM/PWM light load operation mode, Programmable Switching Frequency: 0.3~2MHz, Programmable I _{LIM} : 2~10A, OVP	QFN3×3-20

DC-DC PWM Controller (External Switch)

Part Number	V _{IN}		F _{SW} (MHz)	V _{REF} (V)	Function	Package
SY21401DBC	3	25	0.5	1	Current mode DC/DC controller targeted for Boost, SEPIC, Flyback and Forward applications with DC Input Current Limit	DFN3×3-10
SY21412AFHC	3	25	0.3	1	Current mode DC/DC controller targeted for both Boost and SEPIC applications with DC Output Current Limit	SOP10

Step Up/Down Regulator (Power Switch Integrated)

Part Number	V _{IN} Min Max (V) (V)		I _{LIM} (A)	F _{SW} (MHz)	V _{OUT} (max) (V)	V _{FB} / Accuracy	Input Quiescent Current (μA)	MOSFET R _{on} (H/L) (mΩ)	θ ² C	Feature/ Special Function	Package
SY20518QOC	2.6	5.5	2	1	3.8	0.6V±1.5%	60	50/50		Output Disconnect @Shutdown	QFN2×3-13
SY20516ADPC	2.6	5.5	1.2	1	3.8	0.6V±1.5%	60	100/100		Output Disconnect @Shutdown	DFN3×3-14
SY21612QFC	4	28	Programmable 6A/8A/10A	0.25/0.5/ 0.75/1	28	adjustable	310	25/25	√	Selectable Inductor Current Limit and VBUS Output Current Limit Selectable VBUS Output Voltage:5V, 7V, 9V, 12V, 15V, 20V	QFN4×4-32
SY21612BQFC	4	28	Programmable 6A/8A/10A	0.25/0.5/ 0.75/1	28	adjustable	310	25/25	√	Selectable Inductor Current Limit and VBUS Output Current Limit Selectable VBUS Output Voltage:5V, 9V, 10V, 12V, 15V, 20V	QFN4×4-32
SY21612CQFC	4	28	Programmable 6A/10A	0.25/0.5	28	1V±1.5%	300	25/25		Programmable Output Current Limitation with Ext. Sensing Resistor	QFN4×4-32
SY21618QEC	4	28	Programmable 6A/8A/10A	0.25/0.5/ 0.75/1	28	adjustable	450	19/19		VBUS Output Voltage can be Configured in 0.1V per Step from 3.6V to 21V Selectable Inductor Current Limit and Output Current Limit	QFN5×5-32

LDO Regulator

Part Number	V _{IN} (Min)(V)	V _{IN} (Max)(V)	V _{OUT} (V)	I _{OUT} (A)	Dropout Voltage (mV)	Package	Function
SY20714AAC	3.6	30	3.3	0.05	100	SOT23-5	Reverse Blocking Function
SY20704DEC	2.3	30	Adjustable	0.15	300	DFN2×2-6	Reverse Blocking Function
SY20704AAC	2.3	30	Adjustable	0.15	300	SOT23-5	Reverse Blocking Function
SY20704ZDED	2.5	30	Adjustable	0.15	150	DFN2×2-6	LDO Reg.
SY20725AAC	4	40	Adjustable	0.3	300	SOT23-5	LDO Reg.
SY20733BSCC	0.8	5.5	Adjustable	0.5	90	DFN1.2×1.2-6	Current Limiting Protection, Auto-discharge
SY20731DSC	1.6	5.5	Adjustable	1	0.32V @ I _{OUT} =1A, V _{OUT} =1.5V 0.18V @ I _{OUT} =1A, V _{OUT} =2.8V	DFN3×3-6	Current Limiting Protection, Auto-discharge
SY20731BAJC	1.6	5.5	3.3	1	200	SOT223	Current Limiting Protection
SY20728JBC	3	18	Adjustable	3	0.48V @ I _{OUT} =3A	TO252-5	Zero-current Shutdown Mode; Output Short Circuit Protection
SY20728MAC	3	18	Adjustable	3	0.48V @ I _{OUT} =3A	TO263-5	Zero-current Shutdown Mode; Output Short Circuit Protection
SY20728BMAB	3	18	Adjustable	3	0.48V @ I _{OUT} =3A	TO263-5	Zero-current Shutdown Mode
SY20703MAC	3	55	Adjustable	3	0.45V @ Full Load 3A	TO263-5	Zero-current Shutdown Mode
SY20735DBC	2.375	3.5	Adjustable	3	/	DFN3×3-10	Sink and Source DDR Termination Regulator
SY20735BTDD	2.375	3.5	Adjustable	2	/	DFN2×2-10	Sink and Source DDR Termination Regulator

Protection Switch

Part Number	Package	Enable Logic	OCP	OVP	No. of Channels	V _{IN} (V)	I _{OUT} (A)	R _{DS(ON)} (mΩ)	Special Function
SY20808AAAC	SOT23-5	H	✓		1	2.5~5.5	0.6	80	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808BAAC	SOT23-5	L	✓		1	2.5~5.5	0.6	80	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20814PDC	CSP0.9×0.9-4	H			1	1.05~1.95	1	45@V _{IN} =1.2V 35@V _{IN} =1.8V	Auto output cap discharge function, ultra low input voltage
SY20815PRC	CSP0.79×0.79-4	H		✓	1	2.5~6	1	96	Precise clamping output voltage
SY20804AFAC	SO8	H	✓		1	4.5~18	1.2	110@V _{IN} =12V	Programmable blanking time for DFF control, Default Off when EN ON
SY20804FAC	SO8	H	✓	✓	1	4.5~18	1.2	110@V _{IN} =12V	Programmable blanking time for DFF control, Default On when EN ON
SY20815BPRC	CSP0.79×0.79-4	H			1	1.8~5.5	1.5	80	Independent ON/OFF Control Input
SY20812DAAT	SOT23-5	H	✓		1	2.5~5.5	0.1~2	65	Programmable current limit, reverse blocking
SY20812AAAC	SOT23-5	H	✓		1	2.4~5.5	0.4~2	63	Programmable current limit, reverse blocking
SY20801AAAC	SOT23-5	L	✓		1	2.4~5.5	0.4~2	63	Programmable current limit, reverse blocking
SY20808C20AAC	SOT23-5	H	✓		1	2.5~5.5	2	65	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808D20AAC	SOT23-5	L	✓		1	2.5~5.5	2	65	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20829ADFC	DFN2×2-8	H		✓	1	3~23	2	100	Fixed internal OVP@7.1V, Thermal Shutdown Protection & Auto Recovery
SY20829BDFC	DFN2×2-8	H		✓	1	3~23	2	100	Programmable OVP Threshold Thermal Shutdown Protection & Auto Recovery
SY20828ABC	SOT23-6	H		✓	1	3~23	2	100	Programmable OVP Threshold Thermal Shutdown Protection & Auto Recovery
SY20807CABC	SOT23-6	H	✓		1	2.5~5.5	2	65	TUV/CB, UL Certificate
SY20807BDEC	DFN2×2-6	L	✓		1	2.5~5.5	0~2	65	High accurate programmable current limit, reverse blocking
SY20807CDEC	DFN2×2-6	H	✓		1	2.5~5.5	0~2	65	High accurate programmable current limit and reverse blocking, TUV/CB, UL Certificate
SY20807ZDEC	DFN2×2-6	H	✓		1	2.5~5.5	2	65	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20807LABC	SOT23-6	H	✓		1	2.5~5.5	2	65	Adjustable Current Limit up to 2.0A, OCP/OTP with Latch Off Function
SY20806APAC	CSP0.78×0.78-4	H			1	1.05~5.5	2	37@V _{IN} =5V 38@V _{IN} =3.3V 43@V _{IN} =1.8V	load switch with controlled slew rate
SY20806GPAC	CSP0.78×0.78-4	L			1	1.05~5.5	2	37@V _{IN} =5V 38@V _{IN} =3.3V 43@V _{IN} =1.8V	Load Switch with Controlled Slew Rate
SY20815APRC	CSP0.79×0.79-4	H			1	1.8~5.5	2	95	Ultra low quiescent current for IoT application
SY20808C7AAC	SOT23-5	H	✓		1	2.5~5.5	2.5	70	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808D7AAC	SOT23-5	L	✓		1	2.5~5.5	2.5	70	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808C5CAC	MSOP8	H	✓		1	2.5~5.5	2.5	70	Output discharge at shutdown Reverse Blocking, OCB indicator

Protection Switch

Part Number	Package	Enable Logic	OCp	OVP	No. of Channels	V _{IN} (V)	I _{OUT} (A)	R _{DS(ON)} (mΩ)	Special Function
SY20808D5CAC	MSOP8	L	✓		1	2.5~5.5	2.5	70	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20809LACC	TSOT23-5	H	✓		1	2.4~6	2.5	80	Programmable Current limit
SY20812CAAT	SOT23-5	H	✓		1	2.5~5.5	0.1~2.5	65	Programmable current limit, reverse blocking
SY20808F3ABC	SOT23-6	H	✓		1	2.5~5.5	0~3	45	programmable current limit and reverse blocking
SY20808E1AAC	SOT23-5	H	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808E2AAC	SOT23-5	L	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20808F2ABC	SOT23-6	L	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20809ACC	TSOT23-5	H	✓		1	2.4~6	3	50	Output discharge at shutdown Reverse Blocking, OCB indicator
SY20803ADRC	DFN1.2×1.6-4	H	✓		1	2.5~5.5	3	60	Output discharge at shutdown Reverse Blocking
SY20803DRC	DFN1.2×1.6-4	H	✓		1	2.5~5.5	3	60	Reverse blocking output, ultra low input voltage
SY20813PEC	6 ball CSP	H			1	1.2~5.5	3	22	Auto output cap discharge function
SY20813APEC	6 ball CSP	H			1	1.2~5.5	3	22	No output cap discharge function
SY20822AAC	SOT23-5	H			1	0.6~3.6	3	45	Programmable turn-on delay, Automatic shutdown discharge
SY20861A1AAC	SOT23-5	H	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator, UL Certificate
SY20861B1ABC	SOT23-6	H	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator, UL Certificate
SY20861A2AAC	SOT23-5	L	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator, UL Certificate
SY20861B2ABC	SOT23-6	L	✓		1	2.5~5.5	3	45	Output discharge at shutdown Reverse Blocking, OCB indicator, UL Certificate
SY20821B2ABC	SOT23-6	L	✓	✓	1	2.5~5.5	3	45	Support Fast Role Swap, OCB, Reverse Block up to 28V, TUV/CB, UL Certificate
SY20821B3ABC	SOT23-6	H	✓	✓	1	2.5~5.5	3	45	Support Fast Role Swap, OCB, Reverse Block up to 28V, TUV/CB, UL Certificate
SY20821B4ABC	SOT23-6	L	✓	✓	1	2.5~5.5	3	45	Support Fast Role Swap, OCB, Reverse Block up to 28V, TUV/CB, UL Certificate
SY20802UGC	CSP1.50×1.64-12	H	✓	✓	1	3~18	3	45	OCp/TSd/OVP Protection; Auto-recovery; Programmable current limit, Reverse blocking
SY20802BUGC	CSP1.50×1.64-12	H	✓	✓	1	3~18	3	45	OCp/TSd/OVP Protection; Auto-recovery; Programmable current limit
SY20822ADQC	DFN1.5×1.5-6	H			1	0.6~3.6	4	16	Programmable turn-on delay & Automatic shutdown discharge
SY20823DFC	DFN2×2-8	H			2	0.6~5.5	4	28	Programmable turn-on delay & ramp-up time, integrated OTP SCP
SY20834DBC	DFN3×3-10	H	✓	✓	1	2.5~30	4	50	Programmable soft-start & current limit, 3.3V/5V/12V selectable clamping output
SY20805PLC	CSP1.73×1.73-12	H		✓	1	2.5~30	5	R _{PWPT} =53mΩ (typ.)	Programmable OVP with Integrated Reverse Blocking FET, accurate current level indicator

Protection Switch

Part Number	Package	Enable Logic	OCP	OVP	No. of Channels	V _{IN} (V)	I _{OUT} (A)	R _{DS(ON)} (mΩ)	Special Function
SY20845ADBC	DFN3×3-10	H	✓	✓	1	2.5~30	5	40	Programmable soft-start & current limit, 3.3V/5V/12V selectable clamping output
SY20845CDBC	DFN3×3-10	H	✓	✓	1	2.5~30	5	40	Programmable soft-start & current limit, 3.3V/5V/12V selectable clamping output
SY20845DDBC	DFN3×3-10	H	✓	✓	1	2.5~30	5	40	Programmable soft-start & current limit, 3.3V/5V/9V selectable clamping output
SY20845FDBC	DFN3×3-10	H	✓	✓	1	2.5~30	5	50	Programmable soft-start & current limit, 3.3V/5V/12V selectable clamping output
SY20855ADBC	DFN3×3-10	H	✓	✓	1	2.5~12	5	40	Fixed Current Limit, Prog. SS
SY20855CDBC	DFN3×3-10	H	✓	✓	1	2.5~12	5	40	Fixed Current Limit, Prog. SS
SY20827PYC	CSP0.89×1.43-6	H		✓	2	2.5~25	5	30	Programmable Over Voltage Threshold
SY20816AQLC	QFN3×4-16	H	✓	✓	2	HV: 4.5~23 5V: 4~5.5	HV: 5A 5V: 3A	35 (HV Power Path) 50 (5V Power Path)	I ² C Interface, 2 to 1 Power MUX, Fast Role Swap
SY20816BQLC	QFN3×4-16	H	✓	✓	2	HV: 4.5~23 5V: 4~5.5	HV: 5A 5V: 3A	35 (HV Power Path) 50 (5V Power Path)	I ² C Interface, 2 to 1 Power MUX, Fast Role Swap, Programmable Over Current Response Time for HV/5V Power Path, RVS_Mask bit
SY20816CQLC	QFN3×4-16	H	✓	✓	2	HV: 4.5~23 5V: 4~5.5	HV: 5A 5V: 3A	35 (HV Power Path) 50 (5V Power Path)	I ² C Interface, 2 to 1 Power MUX, Fast Role Swap, Programmable Over Current Response Time for HV/5V Power Path, , RVS_Mask bit
SY20820CPGC	CSP1.8×2-12	H		✓	1	2.5~28	5A continuous, 8A peak	38	Fixed internal OVP@6.8V, Reverse block, Surge protection up to 80V
SY20820APGC	CSP1.8×2-12	H		✓	1	2.5~28	5A continous, 8A peak	38	Programmable Over Voltage Threshold from +4V to +7V
SY20825PTC	CSP1.32×1.86-12	H		✓	1	2.5~28	Programmable 5A	R _{PWPT} =32mΩ (typ.)	Programmable Over Voltage Threshold from +4V to +22V
SY20819ERYC	QFN2×2-9	H	✓		1	2.95~6.5	5	30	Selectable Clamping Output Voltage
SY20818RYC	QFN2×2-9	H	✓		1	2.7~5.5	5	30	Programmable high current limit, reverse blocking, VIN state indicate, Selectable Clamping Output
SY20817ATLC	QFN2×2-12	H	✓		1	2.5~16	1~5	30	Programmable OUT Slew Rate
SY20824BQDC	QFN3×3-16	H	✓	✓	1	4~60	5	40	OCP/TSD/OVP Protection, Auto-recovery, Programmable Output Voltage Clamping
SY28876AQSC	QFN3×4-20	H	✓	✓	1	2.7~18	0.6~5.3	42	True reverse blocking, programmable current limit & dV/dt control, power good and fault outputs
SY20826DUC	DFN3×2-14	H	✓		2	0.8~5.5	6	18	Dual-channel, Programmable soft-start time
SY20810DHC	DFN2×3-10	H			1	0.6~5.5	10	2.8	Controlled and Adjustable Slew Rate through C _{SST} , PG Indicator
SY20877AWPQ	QFN1.5×2-10	H			1	0.285~5.5	10	5.3	Auto Output Discharge

Supervisor & Reset ICs

Part Number	Package	Number of Supplies Monitored	Output Driver/Reset Output	Threshold Voltage (V)	Delay Time (ms)	Reset Threshold Accuracy	Quiescent Current (μA)	Features
SY20867ADTD	DFN1.45×1-6	1	Active high, Push-pull	Adjustable	Programmable	±1%	9	EN ON delay time programmable
SY20867EDTD	DFN1.45×1-6	1	Active high, open drain	Adjustable	Programmable	±1%	9	EN ON delay time programmable
SY20867FDTC	DFN1.45×1-6	1	Active high, open drain	Adjustable	Programmable	±1%	9	200ns EN ON delay time



Battery Management

Switching Charger

Part Number	Function	Package	V _{IN} (V)	Max. Charge Current (A)	F _{SW} (MHz)	Series Cells	Cell Voltage	Special Function
SY20717FAC	Single-Cell High Efficiency Switching Charger	SO8	4~16	1.2	0.8	Single Cell	4.1V	Adaptive Input Current Limit
SY20717BFAC	Single-Cell High Efficiency Switching Charger	SO8	4~16	1.5	0.8	Single Cell	4.2V	Adaptive Input Current Limit
SY20716D1PPC	Single-Cell with USB-OTG	CSP1.93x2.05-20	4~6	1.25/1.55	3	Single Cell	3.5~4.44V	Compliance with USB and USB OTG
SY20752AQIC	Single-cell Charger Step Down Reg.	QFN4x4-16	4~23	2	0.8	Single Cell	4.2V, 4.35V	Power Path Management and Adaptive Input Current Limit
SY20752CDCC	Single-cell Charger Step Down Reg.	DFN3x3-12	4~23	2	0.8	Single Cell	4.2V, 4.35V	Power Path Management and Adaptive Input Current Limit
SY20752BFCC	Single-cell Charger Step Down Reg.	SO8E	4~23	2	0.8	Single Cell	4.2V, 4.35V	Adaptive Input Current Limit
SY20752B1FCC	Single-cell Charger Step Down Reg.	SO8E	4~23	2	0.8	Single Cell	4.1V, 4.4V	Adaptive Input Current Limit
SY20718EQDC	Single-cell Battery Power Bank Charger	QFN3x3-16	4.7~5.5	2	0.5	Single Cell	4.25V, 4.4V	Prog. Current Limit, 2.5A Boost
SY20718CQDC	Single-Cell Bi-directional Power Bank	QFN3x3-16	4.5~5.35	2.5	0.5	Single Cell	4.2V, 4.35V	Prog. Current Limit, 2.5A Boost
SY20718GQDC	Single-cell Battery Power Bank Charger	QFN3x3-16	4.5~5.35	2.5	0.5	Single Cell	4.2V, 4.35V	Prog. Current Limit, 4.75V Boost
SY20719QCC	Single Cell NVDC Switching Charger	QFN4x4-24	3.9~6	2.5	1.5	Single Cell	3.5~4.4V	I ² C Control, USB OTG, Power Path Management
SY20741QDC	Multi-cell Charger Step Down Reg.	QFN3x3-16	4~14	2.5	0.5	1-2 Cells	4.2V, 4.35V	Adaptive input current limit, Blocking FET integrated
SY20741BQDC	Multi-cell Charger Step Down Reg.	QFN3x3-16	4~14	2.5	0.5	1-2 Cells	4.1V, 4.25V	Adaptive input current limit, Blocking FET integrated
SY20741CQDC	Multi-Cell Li-Ion Battery Charger	QFN3x3-16	4~13	2.5	0.5	1-2 Cells	4.1V, 4.2V	Adaptive Input Power Limit, Blocking FET integrated
SY20751TYC	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-26	4.5~5.7	3	0.35	Single Cell	4.2V/4.35V/4.4V	dual output data port, adjustable battery level indication
SY20751BTYC	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-26	4.5~5.7	3	0.35	Single Cell	4.2V, 4.35V, 4.4V	dual output data port, adjustable battery level indication, 5% low power alarm
SY20743QCC	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~13.5	3	1.5	Single Cell	3.856~4.624V, step 32mV	NVDC power path management, OTG
SY20743BQCC	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~13.5	3	1.5	Single Cell	3.856~4.624V, step 32mV	NVDC power path management, OTG, BC1.2 compliance
SY20743CQCQ	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~13.5	3	1.5	Single Cell	3.856~4.624V, step 32mV	NVDC power path management, OTG, Default Input OVP 14V
SY20774BQCQ	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~14	5	1.5	Single Cell	3.84~4.608V, step 32mV	NVDC power path management, OTG, BC1.2 compliance, Default HVTYP=12V

Switching Charger

Part Number	Function	Package	V _{IN} (V)	Max. Charge Current (A)	F _{SW} (MHz)	Series Cells	Cell Voltage	Special Function
SY20774DQCQ	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~14	5	1.5	Single Cell	3.84~4.608V, step 32mV	NVDC power path management, OTG, BC1.2 compliance, Default HVTYPE=9V
SY20744VKS	Single Cell Li-Ion/ Li-polymer DC/DC Switching Charger	CSP 2.2×2.565 -30	3.8~14	2	1.5	Single Cell	4.0-4.5V, step 10mV	Extremley low Iq, NVDC power path management, OTG, dual-channel LDO
SY20764QDC	High Current Step-down Charger	QFN3x3-16	4~14	3.5	0.5	1-2 Cells	4.2V, 4.35V	Adaptive input current limit, Blocking FET integrated
SY20764BQDC	High Current Step-down Charger	QFN3x3-16	4~14	3.5	0.5	1-2 Cells	4.25V, 4.4V	Adaptive input current limit, Blocking FET integrated
SY20753QYC	Single-Cell Bi-directional Power Bank	QFN4x4-20	4~13.5	5	0.3, 0.5	Single Cell	4.1V,4.2V, 4.35V,4.4V	I ² C controlled, USB and Protocol IC Compliance, 20W Boost
SY20759QEQ	2 ports Single-Cell Bi-directional Power Bank	QFN5x5-32	4~13.5	8	0.26, 0.34, 0.42, 0.5	Single Cell	4.1V, 4.2V, 4.35V, 4.4V	Dual ports, Bi-direction for USB-C, I ² C, ADC, BC1.2, 28W Boost
SY20798QEQ	22.5W PD3.0 3IN1 Single Cell Power Bank	QFN5x5-32	4.6~13	5	Programmable	Single Cell	4.2V, 4.35V	USB Type-C DRP support, PD3.0, QC3.0/SCP compliance, Battery Fuel Gauge Indicator, 22.5W output power
SY20757VCC	3IN1 Single-Cell Bi-directional Power Bank	QFN5x5-34	4.6~13.2	5	Programmable	Single Cell	4.2V, 4.35V, 4.4V	QC3.0,AFC/FCP compliance, Battery Fuel Gauge Indicator
SY20754QCC	Single-Cell Bi-directional Power Bank	QFN4x4-24	4~13.5	5	0.5	Single Cell	4.1V,4.2V, 4.35V,4.4V	I ² C controlled, USB Compliance, 5V/3A&12V/1.2A Boost
SY20745RBC	Multi-cell Battery Charger Controller Supporting Boost Mode	QFN3.5x3.5-20	4.5~25	8.128	Programmable (0.615,0.75 and 0.885)	1-4 Cells	Programmable (1.024V~4.8V)	SMBUS Controls
SY20763QDC	3-cell Synchronous Boost Li-Ion Battery Charger	QFN3x3-16	3.6~12.8	1	0.5	3 Cells	4.2V, 4.35V	Prog. Charge Current & Timer, Adaptive Input Current Limit
SY20761QDC	2-cell Synchronous Boost Li-Ion Battery Charger	QFN3x3-16	3.6~5.5	1.2	1	2 Cells	4.1V, 4.2V, 4.35V, 4.4V	Prog. Charge Current & Timer, Adaptive Input Current Limit
SY20762NQDC	Two-Cell Boost Li-Ion Battery Charger With System Power Path Management	QFN3x3-16	3.6~5.5	1.5	1	2 Cells	8.4V	System Power Path Management; External Separated Control for Boost and BATFET
SY20762EQDC	2 cell Boost Li-Ion Battery Charger	QFN3x3-16	3.6~5.5	2	1	2 Cells	4.2V, 4.35V	Prog. Charge Current & Timer, Adaptive Input Current Limit
SY20762E1QDC	2 cell Boost Li-Ion Battery Charger	QFN3x3-16	3.6~5.5	2	1	2 Cells	4.25V, 4.4V	Prog. Charge Current & Timer, Adaptive Input Current Limit
SY20762FQDC	2 cell Boost Li-Ion Battery Charger	QFN3x3-16	3~5.5	2	1	2 Cells	4.2V	Prog. Charge Current & Timer, Adaptive Input Current Limit
SY20765QDC	2-cell Boost Li-Ion Battery Charger	QFN3x3-16	3.6~ 5.5	2	1	2 Cells	4.2V, 4.35V	Prog. Charge Current&Timer, Cell Balance Control
NEW SY20779CQFQ	Multi-Cell Synchronous Buck-Boost Battery Charger Controller	QFN4x4-32	3.5~25	8.128	0.8/1.2	1-4 Cells	1.024~19.2V	NVDC Power Path Management, DPM, OTG
NEW SY20776DQFQ	Multi-Cell Synchronous Buck-Boost Battery Charger Controller	QFN4x4-32	3.5~25	8.128	0.8/1.2	1-4 Cells	1.024~19.2V	NVDC Power Path Management, DPM, OTG

Switching Charger

Part Number	Function	Package	V _{IN} (V)	Max. Charge Current (A)	F _{SW} (MHz)	Series Cells	Cell Voltage	Special Function
SY20761BQDC	2-cell Boost Li-Ion Battery Charger	QFN3x3-16	3.6~5.5	2	1	2 Cells	4.1V,4.2V,4.25V,4.35V	Prog. Charge Current&Timer, Adaptive Input Current Limit
SY20766RAC	2-cell Boost Li-Ion Battery Charger	QFN3x3-20	3.6~5.5	1.6	0.5	2 Cells	4.1V,4.2V, 4.35V	Prog.Charge Current&Timer, Cell Balance&Limit Control, NTC JEITA Compliance
SY20778QYC	Synchronous Boost converter with QC3.0	QFN4x4-20	2.7~4.5	/	0.3, 0.5	Single Cell	/	QC3.0 Compliance
SY20783QIC	2-4 cells Li-Ion synchronous Buck charger	QFN3x3-18	4~28	2	0.5	2-4 Cells	4.1V,4.2V,4.35V	Prog. Input Current Limit, Thermal Regulation, NTC JEITA Compliance
SY20776QFQ	Multi-cell Buck-Boost Battery Charger	QFN4x4-32	3.5~25	8.128	0.8, 1.2	1-4 Cells	1.024V - 19.2V	Prog. CV, CC, VSYSMIN, VDPM, IDPM, OTGCV, OTGCC by I ² C, Power/Current Monitor, PROCHOT, PTM, VAP
SY20779QFQ	Multi-cell Buck-Boost Battery Charger	QFN4x4-32	3.5~25	8.128	0.8, 1.2	1-4 Cells	1.024V - 19.2V	Prog. CV, CC, VSYSMIN, VDPM, IDPM, OTGCV, OTGCC by SMBus, Power/Current Monitor, PROCHOT, PTM, VAP
SY20747QAQ	Multi-cell Battery Charger Controller	QFN4×4-28	4.5~24	8.128 /16.256	0.6, 0.8, 1	1-4 Cells	1.024V - 19.2V	Prog. CV, CC, IDPM by SMBus, Power/Current Monitor, PROCHOT, Turbo Boost Mode
SY20794VWS	USB Type-C Port PD Controller	CSP1.29×1.25-9	3~5.5	/	/	/	/	Support TCPC, Support DFP/UFP/DRP, Support VCONN, Support PD3.0,Support VBUS Detect
SY20743GQCQ	Single Cell Li-Ion DC/DC Switching Charger	QFN4x4-24	3.9~13.5	3	1.5	Single Cell	3.8~4.61V, step 25mV	NVDC power path management, OTG, BC1.2 compliance
SY20744BVKS	Single Cell Li-Ion/ Li-polymer DC/DC Switching Charger	CSP 2.2×2.565 -30	3.8~14	2	1.5	Single Cell	4.0-4.5V, step 10mV	Extremley low Iq, NVDC power path management, OTG, dual-channel LDO
NEW SY20748BQCQ	Single Cell Li-Ion DC-DC Switching Charger	QFN4*4-24(WB)	3.9~13.5	3	1.5	Single Cell	3.856V~4.624V, step 32mV	NVDC Power Path Management, OTG, BC1.2 Compliance, USB Source Detection
NEW SY20777QCQ	Single Cell Li-Ion DC-DC Switching Charger	QFN4*4-24(RDL+WB)	3.9~14	5	1.5	Single Cell	3.84V~4.624V, step 16mV	NVDC Power Path Management, OTG, BC1.2 Compliance, USB Source Detection
NEW SY20767WFS	Single Cell Li-Ion DC-DC Switching Charger with LED driver	CSP3.2*2.8-42	3.9~14	4	0.5, 1, 1.5, 2	Single Cell	3.84V~4.856V, step 8mV	NVDC Power Path Management,OTG,USB Source Detection, Charging Protocol, 2-channel 1.5A LED driver
NEW SY20743GQCQ	Single Cell Li-Ion DC-DC Switching Charger	QFN4*4-24(RDL+WB)	3.9~13.5	3	1.5	Single Cell	3.8V~4.1V, step 25mV; 4.1V~4.61V, step 10mV;	th Management, OTG, BC1.2 Compliance, USB Source Detection
NEW SY20747QAQ	SMBus Controlled 1-4 Cell Battery Charger Controller	QFN4*4-28(WB)(P0.40)	4.5~24	16.256	0.6, 0.8, 1	1~4	1.024V-19.2V, step 16mV	High Accuracy for Voltage/Current Regulation, Accurate Power/Current Monitor,PROCHOT for CPU Throttling,Energy Star Low Iq

Fast Charge

Part Number	Function	Package	ADC	V _{IN} (V)	Typical Output Current(A)	F _{SW} (kHz)	MOSFET Peak Current(A)	Support Protocol	Protection
SY24510UIC	High Efficiency Single Phase 2:1 Switched Capacitor Converter	CSP2.57x3.71-34	NO	4.5~20	2	125~1000	14.5	No	OCP, OTP,OVP
SY20797CVLS	8A dual phase switched capacitor battery charger with ADC	CSP3.03x3.34-56	Yes	3.5~12	8	250~1000	16	No	OCP, OVP, OTP, UCP, VDR

BMS

Part Number	Description	Package	V _{IN} (V)	Series Cells	Protection Mode
SY20789QEQ	3 to 6 Series Cell Battery Monitor, Balance, Protection for Li-ion and Phosphate Application	QFN5×5-32	30	3-6 Cells	OCD、SCD、OV、UV
SY20785QHQ	6 to 12 Series Cell Battery Monitor, Balance, Protection for Li-ion and Phosphate Application	QFN6×6-40	60	6-12Cells	OCD、SCD、OV、UV
SY20784RJQ	9 to 18 Series Cell Battery Monitor, Balance, Protection for Li-ion and Phosphate Application	QFN8×8-64	90	9-18Cells	OCD、SCD、OV、UV

Wireless Charger

Part Number	Function	Package	TX/RX	Wireless Power Standard	Input Voltage Range (V)	Output Voltage Range (V)	Output Power Max (W)
SY20923CQ1	Wireless Power Receiver	QFN5x5x0.8-32	RX	WPC 1.2.4		5	5
SY20913URC	Wireless Power Receiver For Cellphone	CSP2.64x3.94x0.6-52	RX	WPC 1.2.4		5/9/12	15
SY20913AURC	Wireless Power Receiver For TWS/Wearable	CSP2.64x3.94x0.6-52	RX	WPC 1.2.4		5/9/12	15

Gauge IC

Part Number	Functions	Cell Chemistry	Package	Series Cells	Communication Interface	Operating Temperature Range (°C)	Special Functions
SY24561DFC	Cost-save Single Cell Li+ Battery Gauge IC	li-ion	DFN2×2-8	Single Cell	I ² C	-20 to 60	Eliminate Current Sense Resistor



PMIC

Part Number	V _{IN} (Min) (V)	V _{IN} (Max) (V)	Number of Channels	Package	Application	Integrated Function
SY21525AVCS	2.5	5.5	1	WLCSP 2.66×3.89-54	Smart Phones, Tablets	4 integrated power stages and each phase has the capability to deliver up to 5A totally 20A continuous output current.
SY21525BVCS	2.5	5.5	4	WLCSP 2.66×3.89-54	Smart Phones, Tablets	4 integrated power stages and each phase has the capability to deliver up to 5A continuous output current.
SY21523CPZC	2.8	5.5	5 Chs Buck+2 Chs LDO	CSP3.23×3.23-52	SSD	5 Chs Buck(2Ch can work LSW), 2Ch LDO. 3.4MHz I2C, Hardware sleep control; Reset output; Auto PFM/FCCM control; OVP/OCP/SCP/OTP. Enable Output Control.
SY21523EPZC	2.8	5.5	5 Chs Buck+2 Chs LDO	CSP3.23×3.23-52	SSD	5 Chs Buck(2Ch can work LSW), 2Ch LDO. 3.4MHz I2C, Hardware sleep control; Reset output; Auto PFM/FCCM control; OVP/OCP/SCP/OTP. Enable Output Control.
SY21572PZS	2.8	5.5	5 Chs Buck+2 Chs LDO	CSP3.2×3.2-52	SSD	3.4MHz I2C, Hardware sleep control; Reset output; Auto PFM/FCCM control; OVP/OCP/SCP/OTP. Enable Output Control.
NEW SY21576AVTS	2.8	3.7	4 Chs Buck+2 Chs LDO	CSP2.6×3.6-36	SSD	4 Chs Buck and 2 Chs LDO; 3.4MHz I2C; OVP/SCP/OTP; Auto PWM/PFM or Forced PWM Controlled



AC/DC

Part number	App.Type	LED Channels	Input Voltage	LED Voltage	LED Current	Control Method	Switching Frequency	Package	Int.MOS
SY22109DEC	Phone Backlight	1	3 to 5.5V	<38V	<300mA	Boost	1MHz	DFN2x2-6	40V/1A
SY22103AADC/SY22103ADBC	Handheld devices Backlight	1	2.8 to 40V	<40V	<300mA	Boost	1MHz	TSOT23-6 /DFN3x3-10	40V/2A
SY22104DBC	Handheld devices Backlight	1	2.8 to 30V	<30V	<300mA	Boost	1MHz	DFN3x3-10	30V/4A
SY22102ABC/SY22102ADC/SY22102AABC	Handheld devices Backlight	1	2.8 to 30V	<30V	<300mA	Boost	1MHz	TSOT23-6 /SOT23-6	30V/2A
SY22121POC	Phone/PAD Backlight	2	2.7 to 28V	<40V	<30mA	Boost+LDO	1MHz	CSP 1.31x1.31-9	40V/1A
SY22141QDC	Notebook Backlight	4	2.8-24V _{DC}	<35V	<40mA	Boost+LDO	300kHz to 2MHz	QFN3x3-16	36V/2A
SY22161QDC	Notebook Backlight	6	4.5-24V _{DC}	<40V	<30mA	Boost+LDO	1MHz	QFN3x3-16	40V/2A 40V/30mA
SY22186RAC	Notebook Backlight	6	2.8-28V _{DC}	<38V	<50mA	Boost+LDO	500kHz to 1.2MHz	QFN3x3-20	40V/2.6A 40V/50mA
SY22164DOC	Monitor Backlight	4	4.5-28V _{DC}	<65V	<180mA	Boost+LDO	200kHz-900kHz	DFN5x5-16	70V/3A
SY22106FHC	TV Power Backlight	1	8-16V _{DC}	<90V	<1A	OP+LED Driver	NA	SSOP10	NA
SY22142BABC	TV Power Backlight	1	9-28vdc	<200V	<1.5A	Boost	120KHz	SOT23-6	NA
SY22189BFEC	TV Power Backlight	1	8-16V _{DC}	<90V	<1A	Boost LED Driver+ Buck CV+OP	500kHz	SOP16E	18V/3A
SY22162RJC	TV Local Dimming Backlight	16	8-16V _{DC}	<90V	<1A	LDO	NA	QFN8x8-64	NA
SY22122LFEC/SY22122LFFC	Monitor Backlight	4	4.5-30V	<30V	<240mA	Boost + current sink	100KHz-1MHz	SOP16E/ SOP16	60V/3Ω
NEW SY22159RBQ	Notebook or tablet Backlight	6	3V-24V	<40V	6-25mA	Boost	100KHz-1.5MHz	QFN3.5x3.5	40V/200mΩ

LED Lighting(AC-DC)

Part Number	App.Type	PF	Description	Input V _{AC}	Output Power	Output Current	Package
SY22697NFAC	AC Buck non-dimming	>0.5	Self-Bias, QR, Buck, 4 Drain, accurate OVP Int. MOS 500V/5.5Ω	230V _{AC}	<30W	<200mA	SO8
SY22717NFAC	AC Buck non-dimming	>0.5	Self-Bias, QR, Buck, 4 Drain, accurate OVP Int. MOS 500V/4Ω	230V _{AC}	<30W	<300mA	SO8
SY22775FAC	AC Flyback non-dimming	>0.9	Self-Bias, QR, Buck, 4-Drain SO8, Int. comp. accurate OVP, 650V/4.4Ω	230V _{AC}	<20W	NA	SO8
SY22678ABC	AC Buck non-dimming	>0.9	PSR, QR, CC, Buck controller	120/230V _{AC}	<100W	NA	SOT23-6
SY22679BABC	AC Flyback non-dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback controller	120/230V _{AC}	<100W	NA	SOT23-6
SY22601BFAC	Ripple-Remover	NA	Ripple-Remover, Low BOM cost, Thermal Protection	NA	NA	<250mA	SO8
SY22602FAC	Ripple-Remover	NA	Ripple-Remover, Low BOM cost, Thermal Protection	NA	NA	250~600mA	SO8
SY22603AJAC	Ripple-Remover	NA	Ripple-Remover, Low BOM cost, Thermal Protection	NA	NA	0,25~1.2A	TO252-3
SY22604KAC	Ripple-Remover	NA	Ripple-Remover, Low BOM cost, Thermal Protection	NA	NA	0.5~1.5A	TO220-3
SY28611SFAC	Dim-Interface	NA	3-in-1 Dimming Interface	NA	NA	NA	SO8
SY22743UFAC	PFC_Boost_CV	>0.9	QR, CV, Boost, Int. MOS 500V/4.9Ω single winding	230V _{AC}	<50W		SO8
SY22744UFAC	PFC_Boost_CV	>0.9	QR, CV, Boost, Int. MOS 500V/3.5Ω single winding	230V _{AC}	<60W		SO8
SY22824ABC	PFC_Boost_CV	>0.9	QR, CV, Boost, Frequency reduce @ light load	120/230V _{AC}	<300W		SOT23-6
SY22824BABC	PFC_Boost_CV	>0.9	QR, CV, Boost, Burst @light load	120/230V _{AC}	<300W		SOT23-6
SY22650BFAC	PFC_Flyback_CV	>0.9	PSR, QR, CV, Controller	120/230V _{AC}	<80W		SO8
SY22650SFAP	PFC_Flyback_CC_CV	>0.9	SSR, QR, CC, CV, Controller	120/230V _{AC}	<80W		SO8
SY22655ABC	PFC_Flyback_CV	>0.9	PSR, QR, CV, Controller	120/230V _{AC}	<60W		SOT23-6

LED Lighting(AC-DC)

Part Number	App.Type	PF	Description	Input V _{AC}	Output Power	Output Current	Package
SY22654FAC	PFC_Buck_CV	>0.9	PSR, QR, Buck CV, Int. MOS 500V/4.5Ω	120/230V _{AC}	<10W	<250mA	SO8
SY22486FAC	PFC_Buck_CV	>0.9	PSR, QR, Buck CV, Int. MOS 600V/2.2Ω	120/230V _{AC}	<16W	<400mA	SO8
SY22651FAC	AC Buck PWM Dimming	>0.9	PFC, CC, Buck controller, PWM/Analog dim	120/230V _{AC}	<80W		SO8
SY22651ZFAC	DC Buck PWM Dimming	>0.5	CC, Buck controller, PWM/Analog dim	40~400V _{DC}	<80W		SO8
SY22651SFAP	DC Buck	>0.5	CC, Buck Controller, Analog Dim	40~400V _{DC}	<80W		SO8
SY22645FAC	AC Flyback PWM Dimming	>0.9	PFC,CC, Flyback controller, Triac and 0-10V dim	120/227V _{ac}	<80W		SO8
SY22661FAC	AC Flyback PWM Dimming	>0.9	PFC,CC, Flyback controller, 0-10V dim	120/227V _{ac}	<80W		SO8
SY22652NFAC	AC Flyback PWM Dimming	>0.9	PFC, CC, Flyback controller, PWM/Analog dim	120/230V _{AC}	<80W		SO8
SY22652ZFAC	DC Flyback PWM Dimming	>0.5	CC, Flyback controller, PWM/Analog dim	400V _{DC}	<150W		SO8
NEW SY22745FFP	Boost+LLC Combo IC	PF>0.95 THD<5%	SSR,CC/CV Controller	120/277V _{ac}	<400W		SOP16
SY22658FAC	AC Flyback, Resistance Dimming	>0.9	PFC, CC, Flyback controller, Multistage dim	120/230V _{AC}	<80W		SO8
SY22665AAC	AC Buck Triac Dimming	>0.9	QR, CC, Buck, Triac Dimming, Low BOM cost, Int. MOS 350V/4.5Ω	120V _{AC}	<10W	<320mA	SOT23-5
SY22669FAC	AC Buck Triac Dimming	>0.9	QR, CC, Buck, Triac Dimming, Low BOM cost, 4 Drain, Int. MOS 350V/2.5Ω	120V _{AC}	<18W	<320mA	SO8
SY22664FAC	AC Flyback Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback controller, Triac Dimming, single winding	120/230V _{AC}	<40W	NA	SO8
SY22731AFAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 350V/1.5Ω, Triac Dimming, single winding	120V _{AC}	<16W	<200mA	SO8
SY22633FAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 600V/7Ω, Triac Dimming, single winding	230V _{AC}	<12W	<200mA	SO8
SY22634AFAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 600V/5Ω, Triac Dimming, single winding	230V _{AC}	<15W	<200mA	SO8
SY22636FAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 700V/6Ω, Triac Dimming, single winding	230V _{AC}	<15W	<200mA	SO8

LED Lighting(AC-DC)

Part Number	App.Type	PF	Description	Input V _{AC}	Output Power	Output Current	Package
SY22668AFAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 350V/4Ω, Triac Dimming, single winding	120V _{AC}	<10W	<160mA	SO8
SY22753AFAC	AC Buck-Boost Triac Dimming	>0.9	PSR, QR, CC, Buck-Boost/Flyback, Int. MOS 350V/2Ω, Triac Dimming, single winding	120V _{AC}	<15W	<200mA	SO8
SY22781AAAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 350V/5Ω, Triac Dimming, single winding	120V _{AC}	<15W	<100mA	SOT23-5
SY22783AFAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 350V/2Ω, Triac Dimming, single winding	120V _{AC}	<25W	<100mA	SO8
SY22783DFAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 350V/2Ω, Triac Dimming, single winding	120V _{AC}	<25W	<100mA	SO8
SY22791AAAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 500V/8Ω, Triac Dimming, single winding	230V _{AC}	<15W	<100mA	SOT23-5
SY22793AFAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 500V/4.5Ω, Triac Dimming, single winding	230V _{AC}	<40W	<100mA	SO8
SY22793CFAC	AC Boost Triac Dimming	>0.9	PSR, QR, CC, Boost, Int. MOS 500V/4.5Ω, Triac Dimming, single winding	230V _{AC}	<40W	<100mA	SO8
SY22643NFCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB148°C	120V _{AC}	<12W	<70mA	SO8E
SY22643AFCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB110°C	120V _{AC}	<12W	<70mA	SO8E
SY22643BFCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB122°C	120V _{AC}	<12W	<70mA	SO8E
SY22643CFCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB128°C	120V _{AC}	<12W	<70mA	SO8E
SY22643PFCP	AC Linear Triac Dimming	>0.9	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB148°C	120V _{AC}	<12W	<70mA	SO8E
SY22643QFCP	AC Linear Triac Dimming	>0.9	Linear Triac Dimming, Int. MOS 350V/20Ω, TFB122°C	120V _{AC}	<12W	<70mA	SO8E
SY22642A1FCC	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 500V	230V _{AC}	<12W	<45mA	SO8E

LED Lighting(AC-DC)

Part Number	App. Type	PF	Description	Input V _{AC}	Output Power	Output Current	Package
SY22642B1FCC	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 500V	230V _{AC}	<12W	<45mA	SO8E
SY22642C1FCC	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. MOS 500V	230V _{AC}	<12W	5~12mA	SO8E
SY22638A2FCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. Main MOS 500V and Bleeder MOS 700V, Low current ripple	230V _{AC}	<12W	16~30mA	SO8E
SY22638B4FCP	AC Linear Triac Dimming	>0.7	Linear Triac Dimming, Int. Main MOS 500V and Bleeder MOS 700V, Low current ripple	230V _{AC}	<12W	12~20mA	SO8E
SY22746FAC	Charge pump LLC non-dimming	>0.9	PSR, CC, ZVS, Charge Pump, LLC controller	230V _{AC}	<100W	NA	SO8
SY22748FAC	Charge pump LLC non-dimming	>0.9	PSR, CC, ZVS, Charge Pump, LLC, 4 Drain, Low side, Int. MOS 500V/1.1Ω	230V _{AC}	<45W	NA	SO8
SY22749FAC	Charge pump LLC non-dimming	>0.9	PSR, CC, ZVS, Charge Pump, LLC, 4 Drain, High side, Int. MOS 500V/1.1Ω	230V _{AC}	<45W	NA	SO8

LED Lighting(DC-DC)

Part Number	App.Type	Input Range(V)	Description	Max. LED Current	F(Hz)	Topology	Package
SY22648FCC	DCDC Buck	5V-80	Buck, Int. 80V/200mΩ MOS, Analog/PWM dimming	2000mA	500k	Buck	SO8E
SY22649FCC	DCDC Buck	5V-80	Buck, Int. 80V/200mΩ MOS, Analog/PWM dimming	1200mA	500k	Buck	SO8E
SY22646BFCC	DCDC Buck	12V-60	Buck, Int. 60V/660mΩ MOS, ON/OFF dimming	800mA	350k	Buck	SO8E
SY22647AHHC	DCDC Buck	11V-55V	Buck Controller, RGBW 4 channel, PWM dimming	5A	Adjustable frequency	Buck	TSSOP24E
SY22671FFP	DCDC Buck	33V-92V	Buck Controller, Precision Analog Dimming	5A	Adjustable frequency	Buck	SOP16
SY22173ABC	IR LED	2.8V-30	Buck, Int. 30V/200mΩ MOS,PWM dimming	1.0A	1M	Buck	SOT23-6
SY22173BABC	IR LED	2.8V-30	Buck, Int. 30V/200mΩ MOS,PWM dimming, Small dimming scale accuracy	1.0A	1M	Buck	SOT23-6
SY22175FCC	IR LED	2.8V-30	Buck, Int. 30V/100mΩ MOS,PWM dimming,	3.0A	1M	Buck	SO8E
SY22175BFCC	IR LED	2.8V-30	Buck. int.30V/100mΩ MOS,PWM dimming, Small dimming scale accuracy	3.0A	1M	Buck	SO8E
SY22151ABC	IR LED	2.8V-30	Buck. int.30V/100mΩ MOS, Analog dimming,	1.5A	1M	Buck	SOT23-6
SY22177ABC	IR LED	2.8V-25	Buck. Int. 25V/200mΩ MOS, Analog dimming,	0.8A	1M	Buck	SOT23-6
SY22728A1ADC	IR LED	4.0V-23	Sync Buck, Int. 23V/125mΩ&23V/75mΩ MOS,PWM dimming, Small dimming scale accuracy	2.0A	1M	Buck	TSOT23-6
SY22728B1ADC	IR LED	4.0V-23	SYN Buck, Int. 23V/125mΩ&23V/75mΩ MOS,PWM dimming, Small dimming scale accuracy	1.5A	1M	Buck	TSOT23-6
SY22728H1ADC	IR LED	4.0V-23	SYN Buck, Int. 23V/125mΩ&23V/75mΩ MOS, Analog dimming, Small dimming scale accuracy down to 1% dimming scale	1.5A	1M	Buck	TSOT23-6
SY22146AABC	IR LED	2.8V-30	Boost, Int.30V/220mΩ MOS,PWM dimming	2.0A	1M	Boost	SOT23-6
SY22101AADC	IR LED	2.7V-5.5	Boost, Int.40V/400mΩ MOS,PWM dimming, Small dimming scale accuracy	1.0A	1M	Boost	SOT23-6

LED Lighting(MR16)

Part Number	App.Type	PF	Description	Input V _{AC}	Output Power	Output Current	Package
SY22605ABC	MR16 non-dimming	>0.9	Boost, Int.40V/220mΩ MOS	12V _{AC}	<5W	<300mA	SOT23-6
SY22606FCC	MR16 non-dimming	>0.9	Boost, Int.40V/220mΩ MOS	12V _{AC}	<8W	>18Vout	SO8E
SY22608FPC	MR16 non-dimming	>0.9	Boost, Int.40V/120mΩ MOS	12V _{AC}	<5W	>18Vout	CPC8
SY22627FCC	MR16 dimmable	>0.9	Boost+LDO, Int.40V/120mΩ MOS, Best compatibility	12V _{AC}	<8W	>18Vout	SO8E
SY22628FCC	MR16 dimmable		Boost, Int.60V/650mΩ MOS		<20W	>18Vout	SO8E
SY22629ABC	MR16 dimmable		Boost, Int.60V/650mΩ MOS		<15W	8~24Vout	SOT23-6

AC-DC CCCV Charger and Adapter (PSR Flyback Controller)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY22817ABC	PSR Flyback Controller	SOT23-6	NO	<75W	AC LINE	YES	NO	YES	YES	Level 6	<75mW
SY22817AABC	PSR Flyback Controller	SOT23-6	NO	<75W	AC LINE	YES	NO	YES	YES	Level 6	<75mW
SY23214AFAC	POE PSR Flyback controller	SO8	NO	<75W	AC LINE or POE	YES	NO	YES	YES	-	<30mW
SY23213FCP	POE PD Interface	SO8E	YES	<13W	POE	-	-	YES	NO	-	-
SY23215QYC	POE PD+PSR Flyback controller	QFN4x4-20	No	<25W	POE	YES	NO	YES	YES	-	-
SY23211A1QEC	POE PD+PSR Flyback convertor	QFN5x5-32	YES	<12W	POE	YES	NO	YES	YES	-	-
SY23212ATQQ	POE PD+PSR Flyback converter	QFN4x5-28	YES	<13W	POE	YES	NO	YES	YES	-	-

AC-DC CCCV Charger and Adapter (PSR Flyback Converter 600V~700V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY23403Z1FAC	PSR Flyback	SO8	620V	12W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
SY23406ZFAC	PSR Flyback	SO8	620V	18W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
SY23413MFAP	PSR Flyback	SO8	650V	12W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
NEW											
SY23413NFAP	PSR Flyback	SO8	650V	12W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
SY23413YFAC	PSR Flyback	SO8	650V	12W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
SY23416YFAC	PSR Flyback	SO8	650V	18W	AC LINE	YES	NO	YES	YES	Level 6	<75mW
SY23418VFAC	PSR Flyback	SO8	650V	24W	AC LINE	YES	NO	YES	YES	Level 6	<75mW
SY23407FQC	PSR Flyback	SO7	700V	12W	AC LINE	YES	NO	YES	YES	Level 6	<20mW

AC-DC CCCV Charger and Adapter (SSR Flyback Converter 600V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	V _{IN} Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY22863FAC	SSR Flyback	SO8	700V	12W	AC LINE	YES	YES	YES	YES	Level 6	<75mW

AC-DC CCCV Charger and Adapter (PSR Flyback Converter 150V/200V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	V _{IN} Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Soft Start	No load loss
SY22852FAC	PSR Flyback	SO8	200V	8W	36-72VDC or POE	YES	NO	YES	YES	NO	<75mW
SY22851FAC	PSR Flyback	SO8	200V	12W	36-72VDC or POE	YES	NO	YES	YES	NO	<75mW

AC-DC CCCV Charger and Adapter (Buck Converter 350V~700V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	V _{IN} Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY22841AAC	Buck Converter	SOT23-5	500V	2.4W	AC LINE	NO	NO	YES	YES	Level 5	AC/DC power supply
SY22842FAC	Buck Converter	SO8	500V	3W	AC LINE	NO	NO	YES	YES	Level 5	AC/DC power supply
SY22844AAC	Buck Converter	SOT23-5	350V	3.6W	AC LINE	NO	NO	YES	YES	Level 5	<100mW
SY22845FAC	Buck Converter	SO8	700V	4.2W	AC LINE	NO	NO	YES	YES	Level 5	<150mW

AC-DC CCCV Charger and Adapter (PSR Flyback Converter 900V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY23433BFHC	PSR Flyback	SSOP10	900V	7W	AC LINE	YES	NO	YES	YES	Level 6	<75mW

AC-DC CCCV Charger and Adapter (QC2.0/3.0 Controller)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY22872CAC	QC2.0 Controller	MSOP8	No	24W	AC LINE	YES	YES	YES	Level 6	AC/DC power supply

AC-DC CCCV Charger and Adapter (SR Controller)

Part Number	Function	Package	Integrated FETs	Max Vds	Max Power	VOUT Range	Current Mode	Application Mode	OTP Protection	Comment
SY23422AABC	SR Controller	SOT23-6	No	60V	60W	5~15V	DCM,CRM	PSR,SSR	YES	For PoE 48V input application No Awaken Function
SY23425ABC	SR Controller	SOT23-6	No	200V	/	3.3~21V	DCM,CCM	PSR,SSR	YES	
NEW SY23425AABT	SR Controller	SOT23-6	No	200V	/	3.3~21V	DCM,CCM	PSR,SSR	YES	CCM Flyback
SY23432DGD	SR Controller	DFN2*3-8	No	130V	/	3.3~21V	DCM,CRM	PSR,SSR	YES	ZVS Flyback
SY23434FPP	SR Controller	CPC8	No	130V	/	3.3~21V	DCM,CRM	PSR,SSR	YES	ZVS Flyback
SY23429AAZC	SR Switcher	SOT335	60V	60V	10W	5V	DCM,CRM	PSR,SSR	YES	
SY23451FAC	SR Switcher	SO8	60V	60V	15.5W	5V	DCM,CRM	PSR,SSR	YES	
SY23421FAP	SR Switcher	SO8	60V	60V	33W	5V~12V	CCM,DCM,CRM	SSR	YES	For PD charger

AC-DC CCCV Charger and Adapter (PSR Flyback Converter 900V BJT integrated)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OCP Protection	OVP Protection	Energy star	No load loss
SY23401CFAC	PSR Flyback	SO8	980V	3.5W	AC LINE	YES	NO	YES	YES	Level 6	<75mW

AC-DC CCCV Charger and Adapter (PSR Flyback Converter 800V BJT integrated)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OC Protection	OVP Protection	Energy star	No load loss
SY23411WAZC	PSR Flyback	SOT335	800V	6W	AC LINE	YES	NO	YES	YES	Level 6	<50mW
SY23413WFAC	PSR Flyback	SO8	800V	12W	AC LINE	YES	NO	YES	YES	Level 6	<50mW

AC-DC CV Charger and Adapter (SSR Flyback Controller)

Part Number	Function	Package	VIN Range	Isolation	Opto-Coupler	OC Protection	OVP Protection	Energy star	No load loss
SY23510ABC	65kHz pseudo fixed frequency SSR Flyback controller	SOT23-6	9V~30V	Yes	Yes	Yes	Yes	Level 6	<75mW
SY22818AFAP	CCM+QR SSR Flyback controller	SO8	AC LINE	Yes	Yes	Yes	Yes	Level 6	<50mW
NEW SY22818CFAP	CCM+QR SSR Flyback Controller with Input OVP	SO8	AC LINE	Yes	Yes	Yes	Yes	Level 6	<50mW
SY22810FVP	High Frequency QR Flyback Controller with Valley Lockout	SSOP9	AC LINE	Yes	Yes	Yes	Yes	Level 6	<50mW
SY22816WVQ	High frequency QR Flyback controller with valley lockout and E-mode GaN FET driver	QFN 3×4-10	AC LINE	Yes	Yes	Yes	Yes	Level 6	<50mW
SY22812FVP	High Frequency QR Flyback Controller with Valley Lockout and E-mode GaN FET Driver	SSOP9	AC LINE	Yes	Yes	Yes	Yes	Level 6	<50mW

AC-DC CV Charger and Adapter (SSR Flyback Converter 650V E-mode GaN Integrated)



Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OC Protection	OVP Protection	Energy star	No load loss
SY23496XDQ	SSR Flyback	QFN 5×7-18	650V	65W	AC LINE	YES	YES	YES	YES	Level 6	<50mW

AC-DC CV Charger and Adapter (SSR Flyback Converter 850V-1200V MOS Integrated)

Part Number	Function	Package	Integrated FETs	Max Power	VIN Range	Isolation	Opto-Coupler	OC Protection	OVP Protection	Energy star	No load loss
SY23565FIC	SSR Flyback	DIP7	1200V	12W	AC LINE	YES	YES	YES	YES	Level 6	<75mW

AC-DC PFC+LLC Controller



Part Number	Feature	Package	Vin Max	Control Mode	Protection	Topology
SY23505AHXP	HV start up, Integrated X CAP discharge, Input BO/BI Protection, Quasi Resonant Operation in Boost, Integrated Half-bridge driver, CCM & DCM Operation in LLC.	SOP14	30V	PFC: Critical current mode; LLC: Current mode	AC Brown in/out, OCP, OVP, OTP, PFC OPP;	PFC+LLC

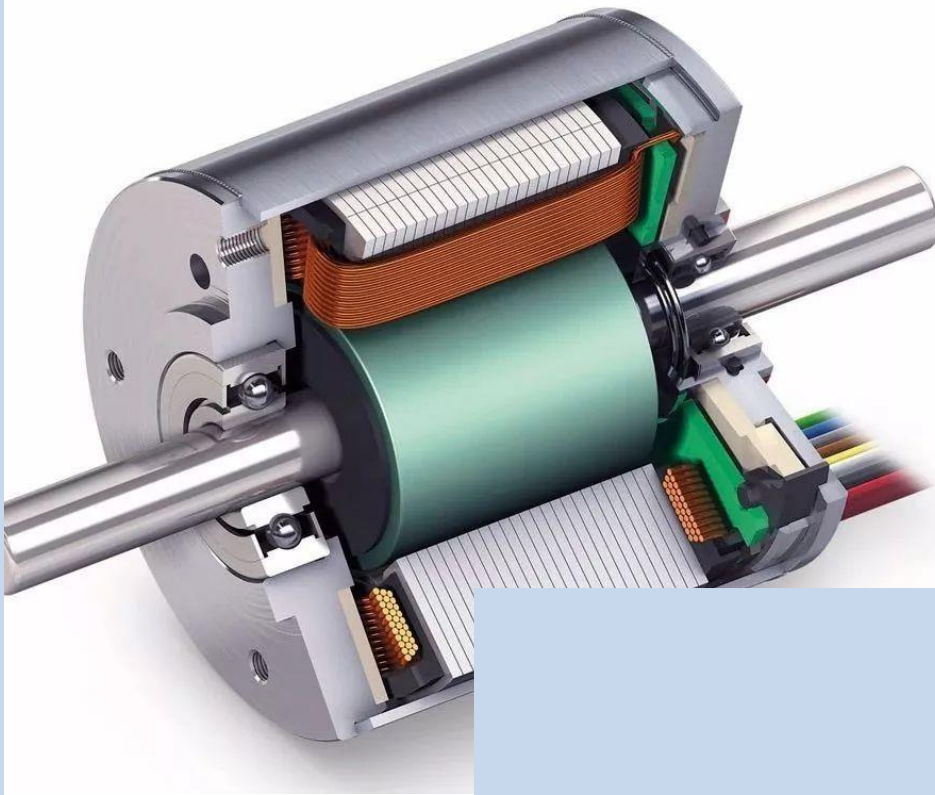

Motor Driver

Motor Driver

Part Number	Recommended Operating Voltage		Drive Current Max (A)	MOSFET Ron HS+LS (mΩ)	Low power Sleep Mode	Package	Typical Applications
	Min (V)	Max (V)					
SY21603HFC	2.5	12	1.5	<480	√	TSSOP-16E	POS Printers, Consumer Products, Robotics, Game Machines, Toys
SY21603QIC	2.5	12	1.5	<480	√	QFN4×4-16	POS Printers, Consumer Products, Robotics, Game Machines, Toys
SY21611FHC	2.5	16	0.8	<700	√	SSOP10	Refrigerators, Stepper Motors
SY21634FCC	5	32	3.6	<500	√	SO8E	Consumer Products, Robotics, DC Brush Motor
SY21604HHC	5	32	3	< 250	√	TSSOP24E	Appliance Fan, 3-phase BLDC Fan, HVAC
SY21621HKP	2.7	18	1.5	<670	√	TSSOP16	Refrigerators, DC Brush Motors, Solenoid Valve Load
SY21626RPQ	5	26	6.5	<140	√	QFN5×5-40	3-Phase BLDC Motor Driver
NEW							
SY21643HHP	5	32	3	<240	√	TSSOP24E	Fan, Pump, HVAC

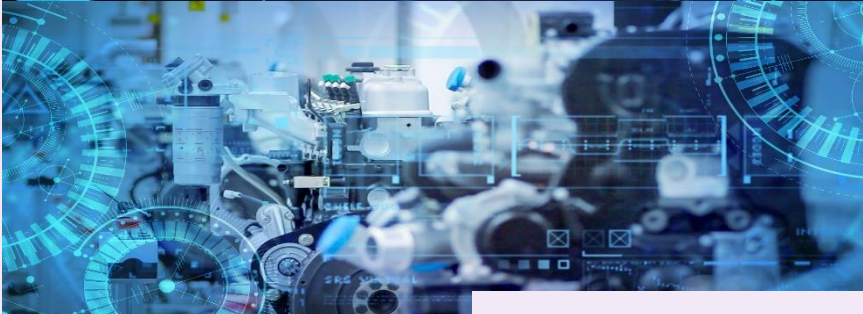

Signal Chain

Class-D Amplifier

Part Number	Input	Ch(#)	Vs_min(V)	Vs_max(V)	Load_min (Ω)	Po(W/Ch)	THD+N(%) @ 1W	SNR(dB)	Features	Package
SY24104QCC	Analog	2	5.5	16	6	7	0.05	100.5	Filter-less	QFN4×4-24
SY24104AQCC	Analog	2	5.5	12	6	4	0.05	100.5	Filter-less	QFN4×4-24
SY24105QEC	Analog	2	6	26	3.2	30	0.03	105.5	AM Avoidance	QFN5×5-32
SY24105BQEC	Analog	1	5.6	26	2.5	60	0.028	106	AM Avoidance	QFN5×5-32
SY24108QEC	Analog	2	5.6	16	3.2	20	0.026	104.1	AM Avoidance	QFN5×5-32
SY24145AQEC	Digital	2	4.5	28	4	20	0.025	101	3.3V/1.8V I/F, 3 Band+ Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT	QFN5×5-32
SY24145BQHC	Digital	2	4.5	28	4	20	0.041	101	3 Band + Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT	QFN6×6-40
SY24145SGAC	Digital	2	4.5	28	4	30	0.026	101.3	3 Band + Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT	TQFP7×7-48
SY24145SQHC	Digital	2	4.5	28	4	30	0.026	101.3	3 Band+ Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT	QFN6×6-40
SY24146SGAC	Digital	2	4.5	28	4	30	0.026	101.3	3 Band + Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT, Capless Headphone Driver	TQFP7×7-48
SY24175DGAC	Digital	2	4.5	28	4	20	0.055	100.7	3 Band + Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT	TQFP7x7-48
SY24150GAF	Digital	2	4.5	28	4	20	0.055	100.7	3 Band + Post band DRC, 12 PEQs + 6 SPEQs, SDOUT	TQFP7x7-48
SY24120QHq	Digital	2	4.5	28	4	20	0.041	101	3 Band + Post Band DRC, 12 PEQs + 6 SPEQs, SDOUT, 4 I2C Address	QFN6×6-40

Headphone or Line Driver

Part Number	Input	Ch(#)	Vs_min(V)	Vs_max(V)	Po(W) @ 1%THD+N	PSRR(dB)	THD+N(%)	SNR (dB)	Features	Package
SY24112QDC	Analog	2	2.2	5.5	21m	83	0.015	106	capacitor-less	QFN3×3-16

Digital Light Sensor

Part Number	Description	Bits	V _{CC}		Comm. Method	I _{DD} @ Power Down	I _{OUT} (μA) @EV=100lux, V _{CC} =3V	Finest Resolution	Gain & Tint Setting	Package
			Min(V)	Max(V)						
SY22306-S1	ALS with side-look package	12	2.3	3.6	I ² C	<1.0uA	110uA	0.029 lux/count	5 gain	SMD3013-4L side-look
SY22309AS22-J01	Ambient Light Sensor	16	2.6	3.6	I ² C	<1.0μA	90μA	0.0079 lux/count	/	SMD2015-8L
SY22316PS32-G00	PXS	16	2.8	3.6	I ² C	<2.0μA	/	/	/	SMD2515-6L
NEW										
SY22312CS42-J10	11-Channel Multi-Spectrum Sensor	16	1.7	2.0	I ² C	<20μA	450μA@V _{CC} =1.8V	/	12 gain+ 9 integration time	SMD3120-8L

Part Number	Application	Channels	Direction	V _{RWM} (V)	C _J (pF)	I _{PP} (A)	P _{PK} (W)	Package
SY205214ABC	USB/VGA/HDMI	4	Uni	5	0.6	3	36	SOT23-6
SY205215AOC	USB2.0	2	Uni	5	0.6	4	50	SOT-23
SY205216DWC	USB Vbus, Smart Phone	1	Bi	24	12	4	180	DFN1.0×0.6-2
SY205218DWC	12V Low Speed Interface	1	Bi	12	4	4	90	DFN1.0×0.6-2
SY205218DXC	12V Low Speed Interface	1	Bi	12	4	4	90	DFN0.6×0.3-2
SY205219DXC	5V High Speed Interface, USB-C	1	Bi	5	0.15	4	55	DFN0.6×0.3-2
SY205220SFC	USB3.x	8	Uni	3.3	0.42	6	30	DFN3.8×1.0-9
SY205223SMD	USB2.0	2	Uni	3.3	0.42	7	40	DFN1.0×0.6-3
SY205221DWC	USB3.0	1	Uni	5	0.5	4	50	DFN1.0×0.6-2
SY205222DVD	HDMI/USB	4	Bi	5	0.5	4.5	45	DFN2.5×1.0-10
SY205223DWC	HDMI/USB	1	Bi	5	0.5	4.5	45	DFN1.0×0.6-2
SY205260DVC	HDMI/USB	4	Uni	5	0.5	6	42	DFN2.5×1.0-10
SY205226DWC	HDMI/USB	1	Bi	3.3	0.4	7	56	DFN1.0×0.6-2
SY205227DVD	HDMI/USB	4	Bi	3.3	0.4	7	56	DFN2.5×1.0-10
SY205228DWC	USB Vbus, Smart Phone	1	Bi	12	25	7.5	210	DFN1.0×0.6-2
SY205229AWC	USB2.0	2	Uni	5	1.2	7.5	100	SOT-143
SY205209ABC	USB/VGA	4	Uni	5	1.2	8	100	SOT23-6
SY205208DXC	USB3.x, USB Type-C	1	Bi	5	0.2	9	55	DFN0.6×0.3-2
SY205207DXC	USB-C/RF Antenna	2	Bi	24.5	0.2	9	50	DFN0.6×0.3-2
SY205206DWC	Normal Cap ESD for General I/O	1	Bi	5	2	10	100	DFN1.0×0.6-2
SY205206DXC	Normal Cap ESD for General I/O	1	Bi	5	2	10	100	DFN0.6×0.3-2
SY205231DWD	Ultra-low Cap ESD for High-speed Interface	1	Bi	5	0.28	10	65	DFN1.0×0.6-2

Part Number	Application	Channels	Direction	V _{RWM} (V)	C _J (pF)	I _{PP} (A)	P _{PK} (W)	Package
SY205232DWC	3.3V High Speed Interface	1	Bi	3.3	1	12	120	DFN1.0×0.6-2
SY205232DXC	3.3V High Speed Interface	1	Bi	3.3	1	12	120	DFN0.6×0.3-2
SY205205ANC	Audio/Key	1	Bi	3.3	27	15	140	SOD523
SY205205DWC	Audio/Key	1	Bi	3.3	27	15	140	DFN1.0×0.6-2
SY205205DXC	3.3V Low Speed Interface	1	Bi	3.3	27	15	140	DFN0.6×0.3-2
SY205236ABC	VGA/RJ45	4	Uni	5	3.5	20	350	SOT23-6
SY205213DXD	USB4,TB4,USB TYPE-C	1	Bi	1.5	0.17	6	24	DFN0.6x0.3-2
SY205237DVD	HDMI2.1	4	Uni	3.3	0.25	7	70	DFN2.5x1.0-10
SY205238DWD	Audio/Key	1	Bi	5	23	10	90	DFN1.0x0.6-2
SY205238DXD	Audio/Key	1	Bi	5	23	10	90	DFN0.6x0.3-2
SY205239DWD	Audio/Key	1	Bi	5	45	20	180	DFN1.0x0.6-2
SY205256DWD	Audio/Key	1	Bi	5	14	9	75	DFN1.0x0.6-2
SY205256DXD	Audio/Key	1	Bi	5	14	9	75	DFN0.6x0.3-2
SY205257DWD	Audio/Key	1	Bi	3.3	17	10	65	DFN1.0x0.6-2
SY205257DXD	Audio/Key	1	Bi	3.3	17	10	65	DFN0.6x0.3-2
SY205258DWD	USB3.x,USB2.0	1	Bi	5	0.45	15	100	DFN1.0x0.6-2

EMI Filter

Part Number	Application	Channels	Direction	V _{RWM} (V)	fc(GHz)	IL	Atten	Package
SY205201SSC	MIPI/HDMI	4	Uni	5	4.0	-0.33dB@10MHz	-35dB@1.5GHz	DFN2.5×2.0-10
SY205203TXD	LCD/Camera	4	Uni	5	0.25	-6dB@10MHz	-20dB@0.8GHz	DFN1.6×1.0-8
SY205255TLD	LCD/Camera	6	Uni	5	0.25	-6dB@10MHz	-20dB@0.8GHz	DFN2.5×1.35-12

Surge Protection

Part Number	Application	Channels	Direction	V _{RWM} (V)	C _J (pF)	I _{PP} (A)	P _{PK} (W)	Package
SY205241AMC	RJ45	1	Bi	24	0.6	6	550	SOD323
SY205242AMC	RJ45	1	Bi	12	0.6	12	550	SOD323
SY205243AMC	RJ45	1	Bi	5	0.6	20	550	SOD323
SY205244AMC	DC IN	1	Bi	5	200	24	350	SOD323
SY205211AMC	RJ45	1	Bi	3.3	0.6	25	550	SOD323
SY205212SLC	Vbus	1	Uni	20	210	25	850	DFN1.6×1.0-2
SY205210DHC	RJ45	4	Uni	2.5	3.5	40	1000	DFN3.0×2.0-10
SY205245SLC	Vbus	1	Uni	12.5	400	52	1100	DFN1.6×1.0-2
SY205246SLC	Vbattery,Smart Phone	1	Uni	5	1100	100	1300	DFN1.6×1.0-2
SY205246AMC	Surge protection TVS for Power line	1	Uni	5.5	1100	100	1300	SOD-323
SY205247SLC	Vbus & Vbat surge protection	1	Uni	5	2100	200	2100	DFN1.6×1.0-2
SY205204SLC	Vbus & Vbat surge protection	1	Uni	4.5	1100	240	3100	DFN1.6×1.0-2
SY205248DWD	Vbus/Vbat	1	Uni	24	85	9	320	DFN1.0×0.6-2
SY205249SLD	VBUS	1	Uni	28	140	22	1000	DFN1.6x1.0-2
SY205250SLD	VBUS	1	Uni	36	95	17	900	DFN1.6x1.0-2
SY205251SLD	VBUS	1	Uni	48	60	12	750	DFN1.6x1.0-2
SY205252THD	RS485	2	Uni	12	6	100	3000	DFN2.0x2.0-5

Programmable Logic Device

Part Number	I/O Pins	LUTs	DFF/ Latches	CNT/ Delays	ASM	Interface	RC Oscillators	Analog Glitch Filters	Analog ACMPs	VDD	Special Features	Package
NEW SY25318CVYQ	18	17	4	6	Y	I2C/UART	25KHz/2MHz/ 25MHz	2	4	3.3V/5V	2x Vref out	QFN2×3-20



Contact Us

Silergy Corp. was founded by a group of technology innovators and business leaders with an average 30 years' experience. We design innovative mixed-signal and analog ICs that utilize our industry-leading process technologies. Widely used in automotive, industrial, consumer, computing and communication devices, our products are designed to improve efficiency and to conserve or measure energy use.

Silergy Corp is a Cayman Island company with its operations headquarters in Hangzhou, China. The company stock is traded on Taiwan Stock Exchange (TWSE: 6415).

We are committed to providing industry-leading performance at an affordable solution cost.

HANGZHOU

No.6, Lianhui St., Binjiang District, Hangzhou, Zhejiang, China
+86- 571-87759971

SHENZHEN

Rm.1006,Tower A, Skyworth Building, High-tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China, P.R.C, Zip code: 518057
Telephone: +86-755-83664630

SHANGHAI

Wanyuan road no. 2163 building B 3A-5room Minhang district Shanghai
Telephone: +86-61510950

NEW TAIPEI

10F., No.653, Bannan Rd., Zhonghe Dist., New Taipei City 23557, Taiwan
Telephone: +886-2-2221-5266 Fax: +886-2-2221-5778

KOREA

(Zip code 446-982), #1202, 120, Heungdeok Jungang-Ro , Giheung-Gu, Yongin-Si, Gyeonggi-Do, Korea
Telephone: +82-70-8667-8128

JAPAN

Kannai Tosei Bldg. II 4Chome 45-1 Sumiyoshicho, Naka-ku, Yokohama-shi Kanagawa, 231-0031, Japan
Tel: +81-45-228-9856
Fax: +81-45-228-9857
Email:sales.japan@silergy.com

INDIA

501,Prestige Towers,Residency Road, Bangalore, Kamataka, India
Tel: +91-9891139579
Email: Rajiv.kumar@silergy.com

EMEA

Telephone:+44 121 449 1010
sales.emea@silergy.com
(support for sales, quotations, FAE technical support, product recommendations)

AMERICAS

North American Headquarters
2600 Great America Way, Suite 601
Santa Clara, Ca 95054
+14087465696
Email:sales.americas@silergy.com

Website: <https://www.silergy.com>

Email: sales@silergycorp.com **(support for sales, quotation, order, etc.)**

Email: marketing@silergycorp.com **(FAE technical support, product recommendation)**